This is the peer reviewd version of the followng article:

The Messinian salinity crisis in the Adriatic foredeep: Evolution of the largest evaporitic marginal basin in the Mediterranean / Manzi, V., Argnani, A., Corcagnani, A., Lugli, S., Roveri, M.. - In: MARINE AND PETROLEUM GEOLOGY. - ISSN 0264-8172. - 115:(2020), pp. 1-19. [10.1016/j.marpetgeo.2020.104288]


Terms of use:

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

21/11/2026 21:17

(Article begins on next page)

Journal Pre-proof



The Messinian salinity crisis in the Adriatic foredeep: Evolution of the largest evaporitic marginal basin in the Mediterranean

V. Manzi, Argnani A, Corcagnani A, Lugli S, Roveri M

PII: S0264-8172(20)30071-4

DOI: https://doi.org/10.1016/j.marpetgeo.2020.104288

Reference: JMPG 104288

To appear in: *Marine and Petroleum Geology*

Received Date: 13 June 2019

Revised Date: 26 December 2019

Accepted Date: 7 February 2020

Please cite this article as: Manzi, V., A, A., A, C., S, L., M, R., The Messinian salinity crisis in the Adriatic foredeep: Evolution of the largest evaporitic marginal basin in the Mediterranean, *Marine and Petroleum Geology* (2020), doi: https://doi.org/10.1016/j.marpetgeo.2020.104288.

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2020 Published by Elsevier Ltd.

Journal Pre-proof

CRediT author statement

Manzi Vinicio: Conceptualization, Methodology, Investigation, Writing - Original Draft, Writing - Review & Editing, visualization, Supervision.

Argnani Andrea: Conceptualization, Investigation, Writing - Original Draft, Writing - Review & Editing

Corcagnani Alessandro: Investigation, Writing - Original Draft, Writing - Review & Editing

Lugli Stefano: Conceptualization, Methodology, Investigation, Writing - Original Draft, Writing - Review & Editing

Roveri Marco: Conceptualization, Methodology, Investigation, Writing - Original Draft, Writing - Review & Editing

Journal Pre-proof

Journal Pre-proof

The Messinian salinity crisis in the Adriatic foredeep: evolution of the largest evaporitic marginal basin in the Mediterranean

Manzi V., Argnani A., Corcagnani A., Lugli S., Roveri M.

ABSTRACT

The recent release of a large number of subsurface geological data by the Italian Minister of Economic Development, including boreholes and seismic profiles, provided the occasion for a new assessment of the deposits associated with the Messinian salinity crisis (MSC) in the Adriatic foreland basin system and a new integration with the outcropping successions of the Apennines. In particular, the study of the Messinian evaporites allowed to reconstruct a new detailed palaeogeographic and palaeobathymetric framework for all the stages of the crisis.

We identified the largest evaporitic marginal basin ever described for the Mediterranean hosting the precipitation of the primary shallow-water gypsum deposits (PLG, Primary Lower Gypsum) during the first stage of the crisis. During the second and third stages of the crisis, the PLG basin underwent uplift and erosion and the evaporite accumulation moved to the deeper part of the basin and was characterized by the deposition of the Resedimented Lower Gypsum unit including clastic evaporites, recycling the PLG ones, primary halite and terrigenous deposits.

The distribution of the different evaporitic facies, was the basis for an improved reconstruction of the upper Miocene tectonic evolution of the Apennines thrust belt. Our results show a clear separation between shallower depocenters, located in the wedge-top and in the Adriatic foreland basins and characterized by MSC stage 1 PLG deposition, and deeper-water ones, located in the Adriatic foredeep and close to the Calabrian Arc, where MSC stage 2 terrigenous and gypsum-bearing clastic deposits and primary halite accumulated.

1. INTRODUCTION

The distribution of the Messinian salinity crisis (MSC) related deposits in the Apennines and in the Adriatic foredeep basin has been matter of several studies during the last decades, mostly based on outcrop data (Roveri et al., 2001, 2004, 2006, 2014b).

Journal Pre-proof

Recently, the Ministry of Economic Development of Italy (*MISE, Ministero dello Sviluppo Economico*), through the project entitled “Visibility of petroleum exploration data in Italy” (*ViDEPI, Visibilità dei dati afferenti all'attività di esplorazione petrolifera in Italia*) has released a large amount of subsurface data filed since 1957 and covering the whole Italian territory. The ViDEPI database includes a large number of boreholes and industrial seismic profiles for hydrocarbon investigation. All the boreholes and the seismic lines can be accessed and downloaded for free at the ViDEPI website (http://www.videpi.com/videpi/videpi.asp) or through the Arcgis platform (https://arcg.is/1vXmrL). A great part of these boreholes crossed the Messinian deposits, especially in the offshore areas. Their analyses made it possible to recognize the subsurface equivalents of the deposits cropping out in the Apennines and to provide a detailed reconstruction of the distribution of the MSC-related deposits all along the Apennines foredeep.

2. THE MESSINIAN SALINITY CRISIS (MSC): A BRIEF OVERVIEW

The Messinian salinity crisis (MSC; 5.97-5.33 Ma) is one of the more dramatic palaeoceanographic and biological event in the Earth’s history, during which huge volumes of evaporites accumulated on the Mediterranean seafloor because of the reduced connections with the Atlantic Ocean, due to the interplay between tectonic uplift in the Gibraltar area and glacio-eustatic changes (Krijgsman et al., 1999). The largest part of the evaporites deposited during the MSC is now buried below the deep Mediterranean seafloor but the large number of outcrops has allowed the reconstruction of a very-high resolution stratigraphic framework through the integration of bio-, magneto- and cyclostratigraphic data (Clauzon et al., 1996; Krijgsman et al., 1999; Hilgen et al., 2007; CIESM, 2008). Although a detailed distribution of the MSC deposits in the offshore area has been made available (Lofi et al., 2011; Lofi, 2018), the lack of continuous cores and logs in the deeper settings together with insufficient seismic resolution leave the interpretation of the different seismic facies still a problematic issue (see discussion in Roveri et al., 2019).

2.1 MSC stages

A large consensus has been reached during the last decade by the scientific community in subdividing the MSC into three evolutionary stages, each of them well time-constrained and characterized by peculiar evaporite deposits and palaeohydrological conditions

Journal Pre-proof

(CIESM, 2008; Roveri et al., 2014a,b). Controversies still persist on what actually occurred during these three stages, especially for what concerns the variations of the Mediterranean sea level.

Stage 1 (5.97-5.60 Ma) - According to Roveri et al. (2008; 2019) and Lugli et al. (2010), shallow-water (< 200m) bottom-grown primary evaporites (PLG, Primary Lower Gypsum; accumulated only in marginal silled basins, whereas organic- and dolomite-rich foraminifer-barren shales sedimented in deeper water (Manzi et al., 2007; FBI, Foraminifer Barren Interval, *sensu* Manzi et al., 2018). Up to 16 shale-gypsum cycles were deposited under a strong astronomical control to form up to 200 m-thick evaporite successions (Vai, 1997; Hilgen et al., 2007; Lugli et al., 2010). According to other authors, based on the interpretation of seismic data, PLG deposition also occurred in deeper waters (Ochoa et al., 2015) or was replaced by halite (Meilijson et al., 2018, 2019).

Stage 2 (5.60-5.55 Ma) - It represents the crisis acme. The marginal basins that hosted the PLG deposition during stage 1 underwent uplift and deep erosion. In this stage evaporite deposition shifted to the deeper settings and was characterized by both clastic (derived from the dismantlement of the PLG unit) and primary evaporites (cumulate deposits of gypsum, halite and K-Mg salts) deposits, grouped into the Resedimented Lower Gypsum unit (RLG; Roveri et al., 2008a). The connections with the Atlantic were further reduced but still sufficient to allow accumulation of marine water-derived salt. This stage was marked by a widespread tectonic activity and by a sea level drop, which is still lively debated in terms of timing (before, during or after halite deposition; see discussion in Roveri et al., 2014b) and magnitude (from 100-200 m; according to Roveri et al., 2016; Manzi et al., 2018; up to 800 m according to Druckman et al., 1995; 800-900 m for the Adratic basin, Amadori et al., 2018; up to more than 1500 m according to Lofi et al., 2005; Bache et al., 2009).

Stage 3 (5.55-5.33 Ma) - This is the last and probably the less known stage of the crisis. The deposition of primary evaporites was limited to the southern and eastern portion of the Mediterranean Sea (Sicily, Cyprus, Crete) and completely absent in the Apennines foredeep. The peculiar Lago-Mare fossil associations, including hypohaline mollusk, ostracod and dinocyst (Rouchy et al., 2001; Bertini, 2006; Orszag-Sperber et al., 2006; Cosentino et al., 2007; 2012; Gliozzi et al., 2007; Grossi et al., 2008; Pellen et al., 2017, Roveri and Manzi, 2006; Roveri et al., 2008c; Ruggieri, 1967), suggests the development of hypohaline conditions possibly related to the input of Paratethyan water in the Mediterranean basin. However, on the basis of the occurrence of marine fossils (fishes;

Journal Pre-proof

Carnevale et al., 2006; dinocysts, Popescu et al., 2009; Pellen et al., 2017; long-chain alkenones, Vasiliev et al., 2017), possible oceanic incursions during the last stage of the crisis have been envisaged (Bache et al., 2009; 2012). Marine waters may have provided the ions needed for the precipitation of the Upper Gypsum evaporites during insolation minima (Manzi et al., 2009). Depleted Sr isotope values and the increased terrigenous deposits during this stage point to a Mediterranean Sea characterized by hypohaline waters, more humid climatic conditions and enhanced fresh-water input (Roveri et al., 2014a,b). The recognition of the peculiar Sr signature in both shallow and deep settings (Roveri et al., 2014a; Gvirtzman et al., 2017; Manzi et al., 2018) suggests the persistence of water connections between the Mediterranean subbasins also during the stage 3 that were likely filled by a unique water body. However, other authors hold that, at least at the beginning of stage 3, the Mediterranean basin was almost desiccated, based on the occurrence of inferred fluvial deposits above the stage 2 halite in the Levantine Basin (Madof et al., 2019).

2.2 MSC surfaces

This MSC stratigraphic framework is based on the recognition of some key-surfaces (Roveri et al., 2019; and their Fig. 3):

onset surface (OS) – It marks the crisis onset placed in the 4th precessional cycle above the Gilbert chron at 5.97 Ma (Manzi et al., 2013). It is associated with the sudden disappearance of the foraminifers. It can be found indistinctively at the base of the PLG unit or at the base of the FBI (Manzi et al., 2007; 2018);

evaporites onset surface (EOS) - It is a diachronous surface flooring the PLG, only locally coinciding with the OS; The Messinian deposits laying above the EOS belongs to stage 1 and are younger than 5.97 Ma;

Messinian erosional surface (MES ≡ base of the p-ev$_1$ unit) - It is a widespread unconformity surface (Cita and Corselli, 1990) locally associated with angular discordance and local subaerial exposure (Vai, 1988). It can be traced from the top of the PLG unit in the marginal basins up to the base of the RLG unit in the deep ones. It has been recognized offshore along the Mediterranean basin margin (Ryan and Cita, 1978; Lofi et al., 2005; Roveri et al., 2014b and references therein). In the deeper portion of the basins the MES pass to its correlative conformity surface (MES-cc; Roveri et al., 2008b; 2019). The deposits laying above the MES belongs to stage 2 or 3 and are always younger than

Journal Pre-proof

5.60 Ma; this surface marks the dismantlement of the PLG deposits and their resedimentation in the foredeep lows (Roveri et al., 1998; 2006; 2008c).

ash layer (al) – A rhyolitic volcaniclastic key-bed dated at 5.53 Ma (Roveri et al., 1998; Trua et al., 2010; Cosentino et al., 2013) found in the whole Adriatic foredeep and locally in Calabria and Sicily, roughly marking the base of stage 3, is often found at the top of the RLG unit;

base of p-ev$_2$ – dated at 5.42 Ma, this surface can be regarded as a maximum regressive surface for the MSC succession (Roveri et al., 2008b) marking a change from regressive to transgressive trend in the post-evaporitic succession. In the marginal settings this surface commonly is found at the base of fluvio-deltaic deposits, whereas, in deeper settings, it marks the base of coarser-grained turbiditic deposits. Above this surface a higher diversity hypohaline biota is commonly present ("Lago-Mare" *sensu stricto;* Roveri et al., 2008c).

Miocene/Pliocene or Messinian/Zanclean boundary (M/P) – this surface marks the Messinian-Zanclean boundary placed at 5.33 Ma, 5 precessional cycles below the base of the Thvera magnetic event (Van Couvering et al., 2000) and marked by the return to fully marine conditions in the Mediterranean; in the Apennines, it is commonly associate with a black shale organic-rich horizon (Roveri et al., 2006).

3. GEOLOGICAL SETTING

The study area includes different portions of the Apennines that have been historically considered as worlds apart. We try here to limit the Apennines subdivision into two main paleogeographic domains, autochthonous and allochthonous that were deposited respectively in the outer and in the inner portion of the Apennines fold and thrust system. We focus on the late Miocene-early Pliocene terms of the stratigraphic succession (Fig. 1).

3.1 Autochthonous domains

All the sedimentary successions deposited in basins resting on the undeformed portions of the foredeep and foreland above Adria and Apula that experienced only minor tectonic translations after the MSC are grouped in this domain.

3.1.1 Northern Apennines

The northern area includes the foredeep basin formed above the Umbro-Marchean units characterized by a thick Triassic-Jurassic shallow water carbonate succession (Burano Anhydrites, Calcare Massiccio, Calcari a Posidonia, Rosso Ammonitico units)

Journal Pre-proof

followed by Cretaceous-Paleogene hemipelagic carbonate and marls (Maiolica, Fucoidi marls, and Scaglia Fms). While the inner Umbro-Marchean unit (Fig. 1a) was involved in the Apennines orogenesis, the outer Umbro-Marchean unit (Fig. 1a) was characterized, since the Langhian, by the deposition of a thick Alpine-derived siliciclastic fill extending for hundreds of km along the Adriatic foredeep from the Emilia-Romagna to the Umbria region (Ricci Lucchi, 1986; Argnani and Ricci Lucchi, 2001).

During the late Tortonian an important tectonic phase affecting the whole Apennines caused the eastward migration of the foredeep (Ricci Lucchi, 1986), the formation of the Vena del Gesso wedge-top basin (VdG; Roveri et al., 2003) and the segmentation of the main foredeep into minor basins (Eastern Romagna; Northern Marche; Laga; Fig. 1).

In the inner sectors of the foredeep, affected by tectonic segmentation, turbidite deposition stopped during the late Tortonian while their deposition continued during the whole MSC and in the Pliocene in the undeformed foredeep (e.g. the Laga basin; Ricci Lucchi, 1975; 1986). The turbidites were deposited in the more subsiding portions of the Adriatic foredeep. Conversely, in wedge-top basins or in the foreland ramp, that were not reached by the turbiditic flows moving along the foredeep axis, the pre-MSC succession commonly consists of hemipelagic deposits (Euxinic shale and Schlier Formations), showing a well-developed cyclic pattern given by the alternation of sapropels, marls and diatomite, the deposition of which is strictly controlled by variation of Earth orbital parameters (Vai, 1997; Krijgsman et al., 1999). These deposits are characterized by a large fossiliferous content (foraminifers, nannofossils, and locally mollusks); their sedimentation rate is quite reduced as the last 1.2-1.5 Ma preceding the crisis onset have been recorded by less than 50-60 m (Manzi et al., 2007; 2018).

The sub-basins of the foredeep were characterized by different stratigraphies. During stage 1, the primary evaporites (PLG) were deposited only in shallow basins, like the thrust-top VdG basin (Roveri et al., 2003) and in the foreland (Roveri et al., 1986; 1992; 2005; Rossi et al., 2015); in the deeper basin of the Romagna and Marche this interval is characterized by the deposition of an organic-rich and dolomite-rich foraminifer-barren shale unit (FBI; Manzi et al., 2007; 2018). During stage 2, the VdG basin was uplifted, the PLG unit was eroded and resedimented in the adjoining basins to form the RLG unit (Manzi et al., 2005). The stage 3, in this sector, is characterized by the absence of evaporites and by the deposition of Apennine-derived terrigenous deposits (San Donato, Colombacci, Laga units; Bassetti et al., 1994; Ricci Lucchi, 1975; 1986; Ricci Lucchi et al., 2002; Roveri et al., 2001; Milli et al., 2007) containing peculiar hypohaline biota and

Journal Pre-proof

showing strong thickness variability, from few meters in the VdG basin up to more than 1 km in the deeper buried portions of the foredeep (Fusignano Fm; Cremonini and Ricci Lucchi,1982). The return to the fully marine conditions at the base of the Zanclean was sharp and marked by a black, organic-rich horizon (Roveri et al., 2004; 2006).

The outer Umbro-Marchean unit is limited to the south by the Gran Sasso thrust front involving the carbonate units of the Lazio-Abruzzi platforms , the front of the Molise-Lagonegro nappe, and is bounded to the east by the Apulian Platform, including the Gargano high (G; in red in Fig. 1a) that originated mostly in the Late Miocene-Pliocene (Argnani et al., 2009).

In the most elevated portions of the Lazio-Abruzzi platform, the carbonate deposition continued until the salinity crisis. In the Maiella area the *Lithothamnion* limestone facies, representing the younger term of the Bolognano Fm., was deposited until the lower Messinian (Brandano et al., 2012; Cornacchia et al., 2017); in its upper part, this unit passes gradually to marl deposits containing *T. multiloba*, whose distribution zone (6.34-5.97 Ma; Sierro et al., 2001; Manzi et al., 2007) is quite close to the onset of the MSC. Around the Gargano high, on top of the Apula platform, the pre-MSC late Miocene succession is incomplete and poorly age-constrained; it includes shallow water limestone deposits (breccias and calcarenites), the deposition of which is supposed to have been continued until the early Messinian. No evaporites crop out in this area. The pre-crisis unit is capped unconformably by the Gravina calcarenites, a Pliocene unit which age is not strongly constrained.

Moving southward, the Messinian deposits of the outer Umbro-Marchean unit continue into the Bradanic Trough, as shown by boreholes and seismic data, although their place into the stratigraphic framework is still lacking . These deposits are buried under the allochthonous Molise-Lagonegro Nappe, which was emplaced during the Plio-Pleistocene (Patacca and Scandone, 2007; 2011). .

3.2 Far-travelled Allochthonous domains

This domain includes all the semiallochthonous geological terranes that during the late Miocene were located in the more inner (western) position of the foredeep and that during the Plio-Pleistocene translated in their present position above the Autochthonous domains (Fig. 1).

3.2.1 Northern Apennines

Journal Pre-proof

In the Northern Apennines the Emilia and the Val Marecchia Epiligurian units were deposited over a late Jurassic-lower Eocene Ligurian complex translating (north)eastward over the Tuscany and Umbro-Marchean-Romagna domains. These Epiligurian satellite basins are characterized by Messinian successions similar to those of the VdG basin (Manzi, 2001; Gennari et al., 2013), with thick PLG unit eroded on top and sealed by the uppermost portion of the Lago-Mare unit and by the Pliocene marine clay unit. The PLG lays conformably on a shelf shale succession (Termina, Ca' i Gessi formations; Ruggieri, 1970; Roveri et al., 1999; Gennari et al., 2013) the base of which is locally marked by late Tortonian sandstones (Termina Fm) and conglomerates (Acquaviva Fm), in the Emilia and in the Val Marecchia, respectively. During the Messinian the Epiligurian basins were located in a more internal position with respect to the VdG basin; they reached their current position during the middle Pliocene.

3.2.2 Southern Apennines

In the southern Apennines two main translated domains can be distinguished: the Molise and Lagonegro nappe and the Calabrian Arc.

The Molise-Lagonegro Nappe (Fig. 1) represents the accretionary wedge of the Calabrian Arc (e.g., Argnani, 2005; Casero, 2004; Vitale and Ciarcia, 2013) and consists of a Triassic-lower Miocene tectonic complex including slabs of deep basinal (shale and cherty limestone) and flyschoid deposits (carbonate or siliciclastic turbidites). These units are capped by a relatively less deformed late Miocene-early Pliocene succession (Matano et al., 2005); it is formed by i) a pre-MSC unit including the Faeto flysch and Toppo-Capuana marls; ii) an evaporite unit (Monte Castello Fm) capped by terrigenous unit (Anzano molasse, Torrente Fiumarella unit) and by the Pliocene shallow marine to deltaic deposits (Ariano unit). The evaporites crop out discontinuously but they are well exposed in three localities, Cervaro River, Monte Ferrara and Scampitella quarries (Matano et al., 2007) where, on the basis of gypsum facies (massive, banded and branching selenite) and Sr signature (within stage 1 range) an incomplete succession, up to 50 m-thick, can be recognized. The base of the PLG is poorly exposed but is assumed to be conformable. Conversely, its top is unconformable and overlain by terrigenous deposits containing scarce hypohaline ostracods and mollusks that can be assigned to the stage 3. A reduced succession is found in the outer portion of the Molise allochthonous both in outcrop and subsurface, including blocks of PLG unconformably capped by the Lago-Mare deposits (Cosentino et al., 2018).

Journal Pre-proof

The Calabrian Arc (Van Dijk, 2000; Fig. 1) consists of pre-Triassic metamorphic and intrusive units in places with Alpine metamorphism, originally located close to Corsica-Sardinia, were translated south-eastward because of the opening of the Tyrrhenian Sea since the late Tortonian (e.g., Argnani 2005; Cipollari et al., 1999; Kastens et al., 1988). The Ionian side of the Calabrian Arc is characterized by a late Miocene-Pleistocene succession resting unconformably on the crystalline basement and its Mesozoic-Cenozoic sedimentary cover, or on the Mesozoic-Paleogenic terrigenous units accreted in front of the Calabrian Arc (Van Dijk, 2000; Roveri et al., 2008; Zecchin et al., 2003). The MSC units rest on a late Tortonian-early Messinian marine unit consisting of thin-bedded turbidites, marl and diatomite (Ponda Formation) resting in turn on a fluvio-deltaic conglomerates succession (San Nicola unit) derived from the dismantlement of the crystalline and metamorphic basement. In the Crotone and Rossano basins the deposits consist of a lower clastic carbonate and gypsum deposits (Roveri et al., 2008a; Manzi et al., 2011), belonging to the RLG unit, that rest unconformably above the pre-crisis units and are floored by the MES. Locally an organic-rich evaporitic-free unit barren of foraminifers, representing the deep time-equivalent of the stage 1 evaporites, is preserved (Roveri et al., 2008d). Above the resedimented gypsum unit a hybrid (gypsum, carbonate and siliciclastic) unit including halite lenses is present (detritico-salina unit; Roda, 1964), in turn capped by a fluvio-deltaic unit with Lago-Mare faunal associations including conglomerate lenticular bodies (Carvane unit, Roda, 1964). The end of the crisis is marked by the deposition of lower Pliocene open marine marls (Cavalieri marls) followed by the siliciclastic deposits of the Belvedere Fm (Roda, 1964; Van Dijk, 2000).

4. METHODS

In this work we have considered 1341 boreholes belonging to the offshore zones of the Adriatic and Ionian Sea (offshore zones A, B, D, F in the ViDEPI database) and the onshore Autochthonous Domain. An extended version of the methods is provided in the supplementary document. Among the 1341 boreholes:

- 642 do not cross the MSC units because are drilled in younger or older deposits;
- 363 do not cross the MSC interval because of an erosional hiatus; in the supplementary documents (tab. S1 and klm file), these boreholes are grouped on the basis of the pre-crisis unit ages;

Journal Pre-proof

- 336 cross the MSC; in the supplementary documents (tab. S1 and klm file), these boreholes are grouped according to the crossed evaporite deposits.

We focused of the late Tortonian-early Pliocene stratigraphic interval in order to reconstruct the distribution of the deposits associated with the Messinian salinity crisis along the Adriatic foredeep.

5. THE OUTCROPPING MSC UNITS

Here we will briefly describe the main physical and sedimentological characters of the different evaporitic units as they appear in outcrop; these features can be useful in the interpretation of the borehole logs.

5.1 Primary bottom-grown gypsum (PLG unit; stage 1)

Due to its peculiar characters the PLG unit is easily recognizable in the field. The complete succession forms large-scale tabular bodies with a thickness of 200 m or more (Fig. 2a,b) and includes up to 16 gypsum beds separated by thin (typically 1-3 m) intervals of dark euxinic shales (Fig. 3a). The internal organization, which is maintained over large distances, is characterized by (Lugli et al., 2010; Fig. 3a): i) two lowermost thin (<10m) gypsum beds (PLG1-2) with giant crystals massive selenite showing a lateral transition to limestone (Manzi et al., 2013); ii) three intermediate very thick (up to 35 m) and very lateral persistent gypsum beds (PLG3-5) with massive and banded selenite facies; iii) up to 11 thick (10-15 m) gypsum bed (PLG6-16) showing the presence of branching selenite in the upper part of the beds. Despite the variation in absolute thickness, the relative thickness of the gypsum beds remains rather constant in the different basins and the presence of the intermediate cluster formed by the thickest beds (PLG3-5; Fig. 13 in Lugli et al., 2010; Fig. 2b, 3a) can be easily identified, thus, representing a key horizon useful for stratigraphic correlations.

The gypsum facies, are characterized by a different resistance to weathering with a characteristic erosional profile. The PLG1-5 gypsum beds being made up by massive coarse and interlocked gypsum crystals (massive and banded facies) with sharp upper and lower boundaries. The gypsum beds of the upper cycles (PLG6-16) may show relatively smoother tops due to the presence of the more erodible branching selenite facies containing a larger amount of limestone and/or shale (Fig. 3b).

The PLG deposits rest conformably on hemipelagic or shelf shale and are erosionally cut at the top by the MES.

Journal Pre-proof

5.2 Gypsum and hybrid clastic deposits (RLG unit; stage 2)

The RLG unit is floored by the MES; it rests unconformably on pre-crisis deposits but locally, in the basinal areas where the MES pass down basin to its correlative conformity surface (MES-cc), a barren organic-rich shale interval (FBI) is present below the unit (Manzi et al., 2007). The RLG evaporites form tens of m-thick lenticular or tabular bodies (Fig. 2c) characterized by a great variability of clastic facies that can be grouped as follows (Manzi et al., 2005; 2011).

5.2.1 Mass wasting gypsum-bearing deposits (RLG1)

This group includes mass-wasting deposits, submarine glides, slides and slumps, cohesive flows (facies R0, R1 of Manzi et al., 2005). These deposits include heterometric PLG-derived gypsum block and chaotic shale. They are characterized by individual lenticular beds, with irregular bases and tops, forming wedge-shape bodies close to the main tectonic slopes, e.g. the large slope complex found close to the structural high boarding the VdG basin (Roveri et al., 2003) similar PLG-bearing chaotic bodies emplaced during the stage 2 of the crisis are described in seismic also at the front of the Ligurian nappe close to Reggio Emilia (Rossi et al., 2002) and in the Cortemaggiore wedge-top basin (Artoni et al., 2007).

5.2.2 gypsum-bearing turbidites (RLG2)

This group includes the gypsum-bearing gravity flow deposits (granular flows and high- to low-density turbidity currents; facies R2 to R7 of Manzi et al., 2005) commonly consisting of m-thick composite graded beds showing a lower coarser-grained (rudite or arenite) gypsum-bearing division capped by a finer-grained one mostly composed by gypsiltite or shale (Fig. 3c). Commonly these beds show a good lateral persistency and limited thickness (Fig. 2c). Carbonate and terrigenous sandstone clasts recycled from older deposits may be found in the coarser-grained interval. The base of these beds is commonly sharp and the top is smooth due to the normal gradation and the transition to the shale interval.

5.3 Primary halite and gypsum deposits (RLG unit; stage 2)

These deposits can only be observed where diapirs crop out or in mines in Calabria (Crotone basin), Sicily (Caltanissetta basin) and Tuscany (Volterra basin) otherwise they are absent in the rest of the Apennines. Halite forms lenticular bodies with local thickness up to 600 m due to intense halotectonics. Internally they consist of dm-thick beds separated by thin anhydrite or shale horizons; thin K-Mg rich salt beds are locally found in the middle part of the halite bodies (Lugli et al., 1999; Manzi et al., 2012).

Journal Pre-proof

5.4 post evaporitic deposits (Lago-Mare unit; stage 3)

The primary gypsum deposits of the Upper Gypsum unit (UG; Manzi et al., 2009) occur only in the Caltanissetta basin (Sicily), capping the RLG unit. In the Calabrian arc and in the rest of the Apennines the RLG is capped by thick terrigenous fine-grained deposits including a rhyolitc volcaniclastic key-bed described in paragraph 2 and showing a coarser-grained upper portion (p-ev_2 unit) including conglomerates (Cusercoli Fm, Romagna, Roveri et al., 1998, 2006; Carvane unit, Crotone basin, Calabria, Roda, 1964), sandstones and thin limestone layers (so called colombacci). The Lago-Mare biota are mostly distributed in the p-ev_2 unit and in its time equivalent, upper half, portion of the Upper Gypsum unit. The end of the crisis is marked everywhere by the sudden transition to fully marine deposits, commonly preceded by a dark shale horizon (Roveri et al., 2006).

6.CRITERIA FOR THE LOG INTERPRETATION OF THE MSC UNITS IN THE SUBSURFACE

The 1341 boreholes drilled in the study area can be grouped as follows on the basis of the crossed deposits (see tab. S1):

Boreholes not crossing the MSC - 642 boreholes did not cross the salinity crisis deposits because drilled within younger or older deposits. The latter have been useful in the definition of the extension of the Allochthonous terrains

Boreholes with hiatus including the MSC - In 363 boreholes the crisis interval is represented by an erosional hiatus of variable amplitude. For those boreholes where the late Tortonian-early Messinian is present, the recognition of shelf carbonates, hemipelagites and turbidites allows a rough distinction between shallow vs. deep pre-MSC deposits.

Boreholes crossing the MSC - The Messinian interval has been crossed in 336 boreholes. In this case, a first distinction is based on the presence or absence of evaporitic deposits. A further distinction is based on the different characteristics of evaporitic deposits.

The different lithologic units belonging to the late Tortonian-early Pliocene interval crossed by the boreholes have been distinguished on the basis of their typical characteristics observed from the geophysical logs, gamma ray (GR), resistivity (RES) and sonic (Δt) as reported in in tab. S2. First, the evaporites can be easily distinguished from the siliciclastic and hemipelagic deposits not only directly (cuttings analysis) but also indirectly on the basis of geophysical logs especially for the higher resistivity, lower Δt and

lower gamma-ray (with the exception of the K-Mg salts). Then, among the evaporites a further distinction between primary gypsum, clastic gypsum and halite deposits can be obtained on the basis of the different values and vertical pattern observed in the gamma ray, resistivity and sonic logs.

A main subdivision includes three main group of rocks.

6.1 Evaporite-free intervals

These intervals consist mostly of clay or marl deposits containing minor sandstone or carbonate horizons devoid of evaporites. The intervals are commonly characterized by very low (<10 Ωm) resistivity, relatively high gamma ray (50-100 API units) and Δt (60-200 **μ**s/ft**)**. The presence of sandstone or carbonate can be highlighted by small increase of resistivity and decrease of gamma ray and Δt. The pattern of geophysical logs has commonly a monotonous trend, local spikes are recorded where thin sand or carbonate layers are crossed.

6.2 Gypsum-rich intervals

Gypsum-rich intervals are characterized by high resistivity (200-600 Ωm), low gamma ray (0-10 API units) and low Δt (45-50 **μ**s/ft**)**. Among them the primary deposits (PLG) can be easily distinguished from the clastic ones (RLG) based on the log patterns:

6.2.1 Primary Lower Gypsum intervals (PLG)

The PLG unit is characterized by a peculiar blocky pattern obtained by thin spikes of low resistivity/high gamma ray that punctuate a high resistivity/low gamma ray base line, that reflect the lithological composition of the succession (Lugli et al., 2010; Sampalmieri et al., 2008; 2010). These features allow the recognition and count of the cycles from the geophysical logs that can be used for stratigraphic correlations. In particular the typical stacking pattern can be recognized from logs (e.g. Patrizia_001, Fiona_001, Morgia_001 boreholes; Fig. S1): two thin (< 10 m) lowermost cycles (PLG1-2), three very thick and massive cycles (PLG3-5) and up to 11 medium (10-15 m) cycles (PLG-6-16). In the geophysical logs, PLG-1-5, consisting of massive and banded selenite facies only, show commonly both sharp bases and tops, whereas PLG-6-16 beds, due to the presence of the branching selenite, may show a sharp base but a smoother top.

6.2.1 Resedimented Lower Gypsum intervals (RLG)

The RLG unit (e.g. Thurio_001 and Dalila_001 boreholes; Fig. S1) is characterized by a (finely) spiky pattern obtained from a thin alternation of spikes with high resistivity/low gamma ray (gypsum) and spikes with low resistivity/high gamma ray (clays). As shown in the previous paragraph the clastic gypsum beds are thinner with respect to the PLG beds.

Journal Pre-proof

6.3 Salt-rich intervals

A very high resistivity (~10000 Ohm.m) identifies the salt-rich interval (e.g. Thurio_001 borehole; Fig. S1). The alternation of thin halite, gypsum and clay may result in a spikey pattern whereas massive halite may produce a blocky one. Halite is commonly characterized by low gamma ray values (0-10 API units) whereas K-salts can be highlighted by higher values (100-200 API units). Δt is commonly low (60-75 **μ**s/ft**)**.

7. RESULTS

7.1 Reconstruction of the Adriatic evaporitic basin

The boreholes used in this work are those crossing the salinity crisis interval represented by sediments or by hiatus. Two main groups can be distinguished (Fig. 4a):
The Adriatic foreland units - These deposits resting on the Autochthonous Domain and covered by the Plio-Pleistocene succession are found in the more external domains that were only partially involved in the Apennine deformation, the foredeep and foreland ramp basins (below the Adriatic Sea).
In the Southern Apennines these units include deposits that rest on the Autochthonous Domain (Fig. 1b), and in particular on the Apulian Platform domain, but are tectonically overlain by the units of the Translated domains. The Adriatic foredeep and foreland units have been found in the Southern Apennines and were reached below the Molise-Lagonegro Nappe allochthonous units. The post-MSC succession is absent or reduced because of the allochthonous thrusting above the MSC units; it becomes progressively more complete toward the external zones on the foredeep, allowing the reconstruction of Far-travelled Allochthonous domains migration during the Pliocene (Patacca and Scandone, 2007; Bigi et al., 2013).
Translated MSC units – These deposits resting on the Far-travelled Allochthonous and covered by the Plio-Pleistocene succession are found in the buried basins of the Calabrian Arc and in the north-eastern portion of the Molise-Lagonegro Nappe.
A reconstruction of the early Tortonian-Messinian stratigraphy obtained by the analysis of the boreholes data is here proposed separated into three time intervals (Fig. 4 b,c,d):
Pre-MSC (Tortonian-Messinian; 8.50-5.97 Ma; Fig. 4b)
The large part of the pre-MSC deposits of the Autochthonous Domain is characterized by the deposition of fine-grained (marls and sapropels) hemipelagic deposits whereas the deposition of the Tortonian-Messinian siliciclastic turbidites is limited to the western portion

Journal Pre-proof

of the northern Apennines foredeep and in the outer Marnoso-arenacea and Laga basins. Shelf carbonate deposits are found in a small area extending in a WNW-ESE direction from the Gran-Sasso-Maiella area to the northern Gargano (between Pescara and Foggia). Interbedded hemipelagic and shelf terrigenous deposits (clays with sandstone lobes) were deposited in the eastern basins of the Calabrian Arc (Roda, 1964; Roveri et al., 1992).

Stage 1 (5.97-5.60 Ma; Fig. 4c)

During the first stage the deposition of the PLG unit is limited to: i) the wedge-top basins of the Autochthonous Domain, ii) the wedge top basins translating above the Ligurian and Molise-Lagonegro nappes and ii) to the Adriatic foreland basins (Fig. 1).

The best example in the wedge-top basins of the Autochthonous domains is found in the Vena del Gesso basin (Roveri et al., 2003) where the reference section for the evaporites of the stage 1 is present (Monte Tondo section; Lugli et al., 2010). In the satellite basins developed above the allochthonous units, three main areas can be distinguished: Marecchia river valley, Irpinia and Molise. In the Marecchia river valley (Gennari et al., 2013) and in Irpinia (Matano et al., 2005) the PLG unit rests conformably above a pre-MSC shelfal shale succession. Conversely in the Molise area Cosentino et al. (2018), having observed that the PLG unit rests indistinctly above the Varicolored Clays (Cretaceous-Paleogene) or the Faeto flysch (Aquitanian-lower Messinian) deposits, suggested the presence of an unconformity at its base. In the area south-west of Termoli, between the Saccione and the Trigno rivers, 13 boreholes crossed an evaporite unit that can be assigned to PLG on the basis of the analogies in term of thickness and trend of the geophysical logs with that drilled a few km to the north resting above the Autochthonous Domain. It is worth noting that 5 out of the 13 boreholes reached the PLG on the top of the Apulian succession below the allochthonous units. As correctly reported by Cosentino et al. (2018) the PLG above the Molise-Lagonegro Nappe is commonly found resting above a clayey succession of not well-defined age. However, considering that the PLG unit crops out in small isolated blocks at the front of the Molise-Lagonegro Nappe (e.g. Stingeti and Gessaro; Cosentino et al., 2018) and that it is present in the foreland below the Molise-Lagonegro Nappe, a different interpretation could be suggested. The PLG could have been accreted at the front of the Molise-Lagonegro Nappe when the allochthonous units translated over the foreland, where the unit rests conformably above the AD; in this view the base of the PLG cannot be considered an unconformity.

Journal Pre-proof

The Adriatic foreland succession is characterized by a main depocenter located in the Adriatic offshore between the Gargano and the Conero Riviera (Ori et al., 1986; Roveri et al., 2005; Corcagnani, 2017). Here, several boreholes crossing the PLG unit allowed the reconstruction of 6 correlation panels (Fig. 5) and 4 isopach maps (Fig. 6).

The PLG commonly overlays hemipelagic deposits, but in the Gran-Sasso-Maiella area it rests above shelf carbonates developed since the early Miocene; thus, suggesting the presence of shallow-waters environment well before the MSC onset. In the other areas no PLG are found. Based on outcrop (Northern Apennines, Manzi et al., 2007; Conero Riviera, Iaccarino et al., 2008; Calabria, Roveri et al., 2008d) and subsurface data in the Northern Adriatic foredeep (Rossi et al., 2015) an organic-rich, dolomitic-rich, foraminifers-barren shale unit can be found in the area where the PLG unit is absent (Fig. 4b).

The peculiar pattern of the PLG successions observed in outcrops and described in the previous paragraphs, allows the recognition in the offshore of the individual cycles from boreholes. The correlations between the boreholes showing the best geophysical logs (see Fig. 5) have been traced along three NW-SE-oriented panels (sections 1, 2 and 3) and three panels perpendicular to the previous ones (sections 4, 5 and 6) in order to show the internal variations of the unit. The cluster formed by the thickest cycles, PLG3-5, can be easily recognized; it is continuous all along the sections providing a helpful tool for stratigraphic correlations. The lowermost cycles PLG1-2 have been detected in several sections; thus, confirming the conformable character of the base of the PLG. Conversely, the unit appear truncated on top by the MES and sealed by the Lago-Mare or directly by the Pliocene deposits; the latter become younger eastward, as described in the Conero area (Ori et al., 1986; Roveri et al., 1986; 2005). Because of this upper truncation the entire succession is rarely preserved. The most complete successions are found in the southern area (Morgia-001 dir, Bomba-001 and Fontemaggiore-002 dir boreholes) where up to 16 cycles can be recognized.

The analysis of the variation of the thickness of individual beds can be performed for the lower cycles only. In fig. 6 it is possible to appreciate the variation of the thickness of PLG1+2, PLG3 and PLG4, each one up to 40 m-thick. The thickness decreases northward, close to the Abruzzo coastline where the Apulian platform deepens (Santantonio et al., 2013; Trincardi et al., 2011c) below the Pescara basin (Ori et al., 1986), filled in mostly during the Plio-Pleistocene. Unfortunately, no boreholes are available in this area and thus it is possible to follow the PLG further to the west only on the ViDEPI seismic lines (e.g. B-415, B-416, B-417, B-418, B-439, B-440 from ViDEPI; the

Journal Pre-proof

subsurface map in Trincardi et al., 2011c) and thus no data on the internal organization of the evaporites can be inferred. In the Conero Riviera (Roveri et al., 1986; 2005) the unit ends eastward against a structural high that has been subsequently incorporated in the Conero thrusts. In general, it is possible to recognize a decrease in thickness of the beds, in section 2, in the western-central part of the basin. Conversely, the larger thicknesses are mostly found in the southeastern part. This suggest that the bed thickness is decreasing with the paleodepth as suggested by Lugli et al. (2007; 2010).

Close to the Adriatic midline, the cycles remain relatively thick. Unfortunately, no boreholes are available beyond the midline, and consequently it is not possible to see how the thickness of the unit and of its individual beds vary further eastward.

The lateral continuity of the PLG is deduced from the seismic profiles and from the geological maps available for the Adriatic offshore (Roveri et al., 2005; Trincardi et al., 2001; 2011a-e; Corcagnani, 2017) that show the absence of major tectonic structures and an almost horizontal bedding. It follows that the thickness obtained from the boreholes can be used for the reconstruction of the isopach maps (Fig. 6b, c, d). The PLG1+2 beds are relatively thin and have been grouped together. PLG3 and PLG4 have been considered in separate maps. No map has been reconstructed for the overlying beds because they are not continuous all along the study area due to erosion at the top.

The preservation of the complete succession in the southwestern area between the Gran Sasso and the Gargano can be explained in terms of evolution of the foredeep. During the pre-MSC this area was shallow, and shelf carbonate deposits accumulated, while hemipelagic deposits were deposited more to the north. During stage 2 and later this area experienced a rapid subsidence that can be related to the flexure of the foreland ramp due to the load of the eastward migrating Apennine chain; thus, the present-day depth of the PLG unit has been reached long after their deposition.

The upper cycles are characterized by a slightly attenuated log response with respect to the PLG3-5 cycles. This can be related to the presence of branching selenite facies that contains shale and/or limestone, making the upper portion of the upper cycles, less resistant to the erosion with respect to the lower cycles. These differences may have implications in the production of the resedimented evaporites after the erosion of the PLG unit; the upper cycles are more suitable to provide sand-sized detritus whereas the lower cycles provide more easily large blocks (Manzi et al., 2005). We infer that the erosion of the upper cycles may have provided a detritus with a grain-size suitable to be transported and redeposited by turbiditic flows in the deeper portion of the foredeep.

Journal Pre-proof

Stage 2+3 (5.60-5.33 Ma; Fig. 4d)

These two stages are considered together because the stratigraphic resolution of the logs does not allow to define with precision the boundary between the two stages.

During stage 2 the previously deposited PLG unit were eroded and resedimented in the deeper portions of the foredeep (Marche and Laga basins), in the Bradanic Through and in the wedge-top basins of the Calabrian Arc.

In general, the resedimented gypsum present at the base of the MSC succession and resting unconformably above Tortonian-early Messinian shale deposits can be assigned to stage 2. The presence of halite lenses intercalated with clastic gypsum has been recognized only in boreholes drilled above the allochthonous units of the Calabrian Arc (fig. 4d). The only exception is found in a small area in the Basilicata region, described below.

Evaporite-free deposits containing typical hypohaline biological association are comprised between the clastic evaporites, below, and the Pliocene, above, and can be assigned to stage 3. The Lago-Mare biota could be present also in the stage 2 deposits but become more abundant in stage 3 (Roveri et al., 2008c); the direct recognition in boreholes indicate a relatively high abundance of biota, suggesting an assignment to stage 3 rather than to stage 2.

7.2 The Messinian Apennines: distribution of the MSC deposits

The distribution of the different evaporitic facies in the Adriatic foredeep led to depict more clearly the geological evolution of the Apennines during and after the MSC. The integration of outcrop and borehole data has been the base for the reconstruction of two borehole-based regional-scale geological sections (Fig. 7) extending from the Tyrrhenian to the Adriatic sides of the Apennines.

A geological section (Fig. 7a) extending S-N from the Salerno gulf up to the Central Adriatic Sea shows the relationships between the Allochthonous units of the Apennine orogenic wedge and the Autochthonous Domain. According to the boreholes stratigraphy, along this section the Far-travelled Allochthonous domains is a tectonic accretionary complex consisting of undifferentiated Miocene deposits including varicolored shale (Sicilids), quartzarenite (Numidian Flysch), cherty limestone, late Tortonian-early Miocene marls and minor thin layers of clastic gypsum and carbonate. The precipitation of the primary bottom-grown gypsum during the stage 1 occurred in the more elevated structural settings: in the piggy-back basins above the northeastward moving Molise-Lagonegro

Journal Pre-proof

Allochthonous units and in the Adriatic foreland (Matano et al., 2005; Roveri et al., 2005). The boreholes that reached the Autochthonous Domain below the Molise-Lagonegro Nappe show that the deposition of the PLG is limited to an area located to the north (fig. 1) characterized by pre-MSC shallow water carbonate deposits. This structural elevated area on the Apula Platform, here called “palaeogargano” and mostly corresponding with the Gargano-Pelagosa paleo sill of Pellen et al., 2017, was located close to the present-day Gargano high (G fig. 6a) and confined the Adriatic PLG basin to the south. To the north of the sill a large Adriatic evaporitic basin hosted the deposition of the PLG (Fig. 4c), from the Termoli area (Guglionesi 001 borehole) up to Adriatic midline (Bora 001 borehole) and even more to the east.

Moving south of the “palaeogargano sill” the MSC deposits disappear for a 50 km-long tract where the Mesozoic carbonates are deeply eroded and capped by Pliocene deposits. In order to find other Messinian deposits, it is necessary to move more to the south, where PLG evaporites are absent and only clastic evaporites of the RLG unit have been reached by boreholes crossing the whole Molise-Lagonegro Nappe (from Montestillo 001 to Taurasi 001).

The W-E section (Fig. 7b), perpendicular to the previous one, shows more clearly the large subsidence experienced by Apula under the load of the Allochthonous units, where the RLG units are capped by up to 200 m of Lago-Mare deposits (Bellaveduta 001). It is worth noting the direct fault system that lowered the western side of Apula in the Bradanic Trough. The section reports the Irpinia basin where the PLG accumulated, on top of the Allochthonous units. Conversely, below the TA, only clastic evaporites are present (from Bellaveduta 001 to Taurasi 001). The zoom of the allochthonous front, in fig, 7c, shows the deformations of Apula and the stratigraphic hiatus below the Pliocene deposits.

A slightly different situation can be described for the Basilicata area (Fig. 8). Here the evaporites, consisting of clastic gypsum and/or halite (Recoleta 001, Cavone Bernalda 001, S. Basilio 001) are found in the allochthonous units overthrusting the late Pliocene marine deposits. No evaporites are found directly above the Mesozoic carbonates of Apula that are unconformably covered by Pliocene deposits, which are progressively younger (from early to upper Pliocene) moving from Letizia 001 to F. Basento 001). The Messinian evaporites can thus be considered here as foredeep units accreted at the front of the Molise-Lagonegro Nappe as they have been deposited more to the west and at a greater depth than their present-day location.

Journal Pre-proof

We have also reconstructed two regional-scale seismic sections in the northern and central Apennines (Fig.9) in order to better show the distribution of the evaporites in the Adriatic foreland. In the northern Apennines (Fig. 9a) we have reconstructed a seismic section, extending in a SSW-NNE direction from the Vena del Gesso Basin to the Adriatic foreland in the Veneto area, by integration of two published seismic sections (section 5 of Fantoni et al., 2010; section SL-1 of Roveri et al., 2003). The PLG deposits are limited to the more elevated positions, in the wedge-top VdG basin, where they crop out, and in the foreland only in a limited portion beyond the more external thrust involving the Mesozoic succession with its hangingwall anticline is now located below the city of Ferrara. Conversely, the more subsiding area saw the deposition of a thick terrigenous turbidites unit (Fusignano Fm; Cremonini and Ricci Lucchi, 1982), that includes resedimented gypsum deposits at its base, laying unconformably above the late Tortonian-early Messinian deposits or, in the deeper portion of the foredeep, conformably above an organic- and dolomitic-rich shale interval representing stage 1 (PLG time-equivalent deposits; Manzi et al., 2007; Rossi et al., 2015).

In the central Apennines we have reconstructed a second seismic section (Fig. 9c) that integrating two published sections (fig. 1b of Bigi et al., 2011; fig. 6 of Wrigley et al., 2015) and 5 seismic lines available from the ViDEPI database (Fig. 9b). In this section it is possible to appreciate the great extension of the Adriatic evaporitic units. The integration of seismic and borehole data allows to recognize the conformable base and the unconformable top of the evaporitic unit eroded by the MES. In the eastern side, the PLG unit is limited by a deep thrust belonging to the external Dinaric front and involving the more external portions of the Mesozoic carbonate platform and the Oligo-Miocene succession; more eastward the MSC units are no longer present. Moving to the western termination of the PLG basin a change in the seismic geometries is observed across a thrust fault few km west of the Dante_001 borehole. Beyond this structure the reflector marking the base of the PLG is lacking and the MES cuts down to the pre-MSC units and is onlapped by post-evaporitic deposits which become older to the west up to include the late Messinian terms of the Laga Formation (stage 2 and 3). Gypsum-clastic deposits (indicated with G in Fig. 9b) are found in boreholes at the base of this MES-floored post-evaporitic unit. The MSC units become thicker moving further to the west, in the depocenter of the Laga basin where a 2500-3000 m-thick turbiditic unit was deposited during the whole Messinian (Bigi et al., 2009; Artoni, 2003); around 700 m of this unit was deposited during the post-evaporitic interval (stage 2+3).

Journal Pre-proof

8. DISCUSSION

8.1. Implication for tectonic reconstructions

The distribution of the evaporites provides some important constraints that can be used for the restoration of the Apennines in the Messinian.

A first constraint comes from the presence of the MSC deposits below the Molise-Lagonegro Nappe, which implies a restoration of the allochthonous front up to 100 km to the south (fig. 7a) and to the west (fig. 7b), thus a minimum total retreat of the front of the Molise-Lagonegro Nappe up to 65 km to the SW.

A second important constraint comes from the PLG distribution. At present time the elevation of the PLG above the allochthonous domains reach more than 750 m above sea level in the Irpinia basins, and around 100 m in the Biferno Valley (Cosentino et al., 2018). In the Adriatic offshore the PLG are at different depths varying from almost 2 km below sea level in the south part of the basin and around 800-1000 m in the northern one. Since the deposition of the PLG occurred in photic environment in shallow water basins (<200 m according to Lugli et al., 2010), it is possible to reconstruct the palaeobathymetry of the different sectors. This allows to reconstruct the vertical movements that affected the different sectors of the Apennines. For instance, the Irpinia basin have been uplifted of more than 900 m since the PLG time, likely because of the overthrusting of the Molise-Lagonegro nappe above the Apula Platform; the latter, due to the load of the Allochthonous domains subsided rapidly more than 1500 m.

Integrating published paleotectonic reconstructions (Argnani, 2005; 2013; Vai, 2016) with the constraints obtained from the distribution of the MSC deposits we can outline a palaeogeographical reconstruction that account for the depositional environments during the salinity crisis (see the paleogeographic map in Fig. 10).

The paleogeographic map refers to the stage 2 of the MSC, but also includes the location of the PLG (stage 1) in order to show the relationships between the shallow depositional areas of PLG that represent the source of the clastic evaporites deposited in the deeper basins (e.g. Apennine foredeep and deep wedge top basins) during stage 2, as described below.

To appreciate the contribution of the detailed Messinian stratigraphy and facies analysis three main steps in the evolution of the Apennines can be considered.

Pre-MSC (8-5,97 Ma)

Journal Pre-proof

This interval is very important to understand the evolution of the Apennines because it includes an important phase of tectonic reorganization of the Mediterranean area that is marked by the widespread deposition of coarser grained siliciclastic deposits (Fontanelice member of the Marnoso-arenacea, Fm Northern Apennines, Ricci Lucchi, 1975; Roveri et al., 2003; Laga Fm., Central Apennines, Ricci Lucchi, 1975.; S. Nicola dall'Alto conglomerates, Calabria, Roda, 1974; Terravecchia Fm, Sicily, Ruggieri and Torre, 1984) followed by a phase of tectonic quiescence that preceded the onset of the crisis and that is characterized by the predominant deposition of hemipelagic (Schlier, Tripoli, euxinic shales Fms) and, locally, shelf carbonate deposits (Fig. 4).

Stage 1 (5.97-5.60 Ma)

This interval is characterized by the deposition of PLG deposits in shallow-water (<200 m; Lugli et al., 2010), silled basins formed in the fold-and-thrust belt (wedge-top basins) and possibly in the foreland (Figs. 4, 10). Compared with the other Mediterranean areas where the unit crops out, the Adriatic basin is much larger (see comparison in tab. S1). Additional smaller occurrences of PLG deposits above the foreland, are found in basins located both onshore (EV basin) and offshore (between Ravenna and the Po river delta)

All these basins containing PLG can be considered to have an average paleo water-depth of 100 m. At the same time, in the deeper poorly oxygenated portion of the basins an organic-rich barren shale unit is found in the northern Apennines (Manzi et al., 2007), Calabria (Roveri et al., 2008d), Sicily (Manzi et al., 2011) and in the Tyrrhenian (Roveri et al., 2014a), Piedmont (Dela Pierre et al., 2011), and Levant basins (Manzi et al., 2018)

Stage 2+3 (5.60-5.33 Ma)

After stage 1, a new important tectonic phase possibly enhanced by a sea level drop, for which magnitude, timing and duration are still debated (see paragraph 2.1 MSC stages), was responsible for the incision of the PLG deposits and their resedimentation in the topographic lows via gypsum-bearing slides, olistostromes and turbidity currents. This time interval is also characterized by strong evaporation, possible related to a further restriction of the connections with the Ocean, testified by the accumulation of a large volume of halite in the deepest depocenters. All these evaporites, resting on the MES, are included in the RLG unit (Roveri et al., 2008a). What really happened in this phase is a highly controversial point in the MSC debate. However, one of the proposed scenarios envisaging that increased evaporation led to the formation of halite-saturated brines in shallow-water settings which moved as density currents toward the deeper basins of the Mediterranean (Roveri et al, 2014c), fits well with the observations in the study area. It is

Journal Pre-proof

733 worth noting, infact, that halite has not been found in situ above the Apulian Platform, but it
734 is present in some sectors of the Calabrian Arc (e.g., the Crotone basin), in those area that
735 were deeper during the pre-MSC and stage 1 (Figs. 4, 10). Following this interpretation, a
736 thick halite unit was deposited in the deep Ionian basin and in its western sector. The
737 halite unit was subsequently accreted at the front of the Calabrian Arc during the south-
738 eastward migration of the arc that occurred in the Plio-Quaternary (e.g. Gutsher et al.,
739 2017).
740 In the Apennine outcrops the RLG unit is overlain by thick terrigenous deposits
741 (Fusignano, San Donato, Colombacci, Laga, Carvane Fm) including the typical brackish
742 Lago-Mare biological association in its upper part. Notably, in Sicily, this interval is
743 characterized by the deposition of the Upper Gypsum deposits.
744 During the uppermost Messinian, the Apennine foredeep has been sometimes considered
745 to be segmented in small perched basins (Bache et al. 2012, Pellen et al., 2017 and
746 reference therein), completely isolated from the Mediterranean by the Gargano-Pelagosa
747 sill. On the contrary, in our reconstruction (Fig. 10) the Adriatic and Ionian water masses
748 were connected, although the depocentral part of the Apennine foredeep (during stage 2)
749 was confined to the south by the allochthonous units that were encroaching the Apulian
750 Platform. Our analysis of the ViDEPI dataset allows to define a large area (pink area in
751 Fig. 04 d) where the evaporites are buried below the Molise-Lagonegro Nappe (Fig. 7). On
752 the basis of log patterns, the unit can be interpreted as clastic evaporites (RLG), similar to
753 those extending the Romagna to the Laga basin (Manzi et al., 2005). Conversely, the
754 evaporites found above the Molise-Lagonegro Nappe belong to the PLG, deposited during
755 stage 1.
756 Therefore, it can be inferred that the Molise-Lagonegro Nappe during stage 1was close to
757 sea level, because of its thrusting onto the Apulian Platform. On the contrary, the stage 2
758 deposits in the Crotone basin, resting above the allochthonous units, indicate a deep water
759 depositional environment.
760 The black arrows in Fig. 10 are intended to illustrate the inferred routing of clastic
761 sediments, without implying a precise path. The same applies to the red arrows that depict
762 possible flow paths of salt brine feeding the deep basin, coming from the adjacent shallow
763 marine areas where the brine factories are inferred to be located. The slopes of the halite
764 basins are studded by canyons (e.g. Lofi, 2018) which can act as potential fairways for the
765 clastic gypsum turbidites and the salt brines.

Journal Pre-proof

It is worth noting that borehole data do not allow to reconstruct the high-resolution stratigraphic framework for the stage 3 which was obtained from the outcropping successions. It follows that, the distribution of the Lago-Mare sediments below the Molise-Lagonegro Nappe can not be defined.

8.2. The distribution of the PLG deposits at the Mediterranean scale

Another important output derived from the analysis of the evaporite deposits in the Mediterranean is represented by the reconstruction of the area where the PLG deposits accumulated during the first stage of the crisis. The area where these evaporites have been preserved from erosion in the Adriatic and Emilia shallow foreland settings (Fig. 1) can be estimated to be ~30'000 km^2.

A comparison with the other PLG basins in the Mediterranean, taking a rough calculation based on the present-day PLG distribution from literature (Tab. S1), suggests that the areal extent of the deposits in the Adriatic region may have been greater than the sum of all the other PLG basins of the entire Mediterranean, which is about 45'000 km^2. The occurrence of such a large area of PLG deposition can be related to the tectonic setting that provided a large shallow-water basin isolated from the main clastic supplies of Alpine and Apennines provenance, which accumulated in the deeper foredeep settings. Moreover, the preservation of the PLG deposits was favored by the subsidence that affected the Adriatic foreland after stage 2, related to the load of the eastward migrating Apennine thrust belt.

9. CONCLUSIONS

After the public release of the subsurface data obtained for hydrocarbons investigations in Italy, a large number of boreholes and seismic data have been made available. The analyses and the integration of these data allowed to reconstruct with an unprecedent detail the distribution of the MSC evaporites and evaporite-free deposits and the evolution of the Apennines chain. The main conclusions of our work are:

- during stage 1 the deposition of the evaporites was limited to the marginal basins located in the Apennines wedge-top and foreland;
- the Adriatic foreland basin represents the largest evaporitic marginal basin of the Mediterranean ever described;
- in the Adriatic foreland the PLG unit rests conformably above hemipelagites or shallow-water carbonates;

Journal Pre-proof

- the geophysical logs allow to recognize and count the evaporite cycles from the boreholes, providing a 3D reconstruction of the PLG succession;
- the thicker, more complete and better preserved PLG successions are located in the western portion of the Adriatic basins; their preservation was favored by the subsidence due to the foreland flexure induced by the progressive load of the Apennine orogen during the Plio-Pleistocene;
- the PLG unit is truncated on top by the MES, which is in turn sealed by the latest Messinian Lago Mare deposits or by the Pliocene;
- the MES can be followed from the top of the PLG unit toward the base of the Late Messinian-early Pliocene succession; clastic gypsum deposits are locally found above it;
- in the deeper portion of the Apennine foredeep (central and northern Apennines) gypsum is a minor component of the siliciclastic turbidite fill;
- within the orogenic edifice, the halite deposition is limited to small satellite basins above the Calabrian Arc (Basilicata area, Crotone basin) where it is associated to clastic gypsum.
- the distribution of the evaporites provides an estimation of the vertical and horizontal movements that affected the Autochthonous and Allochthonous settings of the Apennines thrust-belt and foreland system after the MSC.

Journal Pre-proof

ACKNOLEDGMENTS.

Journal Editor (M. Zecchin), Associate Editor (F. Bache) and three anonymous reviewers are greatly acknowledged for their useful suggestions that let us to greatly improve the earlier version of the manuscript.

REFERENCES

Amadori, C., Garcia-Castellanos, D., Toscani, G., Sternai, P., Fantoni, R., Ghielmi, M., Di Giulio, A., 2018. Restored topography of the Po Plain-Northern Adriatic Region during the Messinian baselevel drop - implications for the physiography and compartmentalization of the paleo-Mediterranean basin. Basin Research. doi: 10.1111/bre.12302

Argnani, A., 2000. The Southern Apennines-Tyrrhenian System within the kinematic of the Central Mediterranean. Mem. Soc. Geol. It., 55, 112-122.

Journal Pre-proof

Argnani, A., 2005. Possible record of a Triassic ocean in the southern Apennines. Bollettino della Società Geologica Italiana, 124, 109-121.

Argnani, A., 2009. Evolution of the southern Tyrrhenian slab tear and active tectonics along the western edge of the Tyrrhenian subducted slab. Geological Society of London, Special Publications 311, 193-212.

Argnani, 2013. The role of Mesozoic palaeogeography in the evolution of the Southern Apennines. Rend. Online Soc. Geol. It., 25, 11-20.

Argnani, A., Ricci Lucchi F., 2001. Tertiary silicoclastic turbidite systems of the Northern Apennines, 327-349. In Vai G.B and Martini I.P. Eds. “Anatomy of an Orogen: The Apennines and Adjacent Mediterranean Basins” Springer.

Artoni, A., 2003. Messinian events within the tectono-stratigraphic evolution of the Southern Laga Basin (Central Apennines, Italy). Boll. Soc. Geol. It., 122, 447-465.

Artoni, A., Rizzini, F., Roveri, M., Gennari, R., Manzi, V., Papani, G., Bernini, M., 2007. Tectonic and Climatic Controls on Sedimentation in Late Miocene Cortemaggiore Wedge-Top Basin (Northwestern Apennines, Italy). In: Lacombe O., Lavé J., Roure F., Vergés J. (Eds.) Thrust belts and Foreland Basins. From fold kinematics to hydrocarbon systems. Springer.

Bache, F., Olivet, J.-L., Gorini, C., Rabineau, M., Baztan, J., Aslanian, D., Suc, J.-P., 2009. Messinian erosional and salinity crisis: view from the Provence basin (Gulf of Lions, western Mediterranean). Earth and Planetary Science Letters 286, 139–157.

Bache, F., Popescu, S.M., Rabineau, M., Gorini, C., Suc, J.P., Clauzon, G., Olivet, J.L., Rubino, J.L., Melinte-Dobrinescu, M.C., Estrada, F., Londeix, L., Armijo, R., Meyer, B., Jolivet, L., Jouannic, G., Leroux, E., Aslanian, D., Reis, A.T.D., Mocochain, L., Dumurdžanov, N., Zagorchev, I., Lesić, V., Tomić, D., Namik Çağatay, N., Brun, J.P., Sokoutis, D., Csato, I., Ucarkus, G., Çakir, Z., 2012. A two-step process for the reflooding of the Mediterranean Basin after the Messinian Salinity Crisis. Basin. Research 24, 125-153.

Barone, M., Critelli, S., Le Pera, E., Di Nocera, S., Matano, F., Torre, M., 2006: Stratigraphy and Detrital Modes of Upper Messinian Post-evaporitic Sandstones of the Southern Apennines, Italy: Evidence of Foreland-Basin Evolution during the Messinian Mediterranean Salinity Crisis. International Geology Review, 48, 702–724.

Bassetti, M.A., Ricci Lucchi, F., Roveri, M., 1994. Physical stratigraphy of the Messinian post-evaporitic deposits in Centralsouthern Marche area (Appennines, Central Italy). Mem. Soc. Geol. Ital. 48, 275–288.

Bertini, A., 2006. The Northern Apennines palynological record as a contribute for the reconstruction of the Messinian palaeoenvironments. Sedimentary Geology 188/189: 235-258.

Journal Pre-proof

Bigi, S., Moscatelli, M., Milli, S., 2009. The Laga basin: Stratigraphic and Structural Setting. Geol.F.Trips, 1, 50-27

Bigi, S., Casero, P., Ciotoli, G., 2011. Seismic interpretation of the Laga basin; constraints on the structural setting and kinematics of the Central Apennines. Journal of the Geological Society of London, 168, 179-190.

Bigi, S., Conti A., Casero, P., Ruggiero L., Recanati, R., Lipparini, L., 2013. Geological model of the central Periadriatic basin (Apennines, Italy). Marine and Petroleum Geology, 42, 107-121.

Boccaletti, M., Ciaranfi, N., Cosentino, D., Deiana, G., Gelati, R., Lentini, F., Massari, F., Moratti, G., Pescatore, T., Ricci Lucchi, F., Tortorici, L., 1990. Palinspastic restoration and paleogeographic reconstruction of the peri-Tyrrhenian area during the Neogene. alaeogeography, Palaeoclimatology, Palaeoecology, 77, 41- 50.

Brandano, M., Lipparini, L., Campagnoni, V., Tomassetti, L., 2012. Downslope-migrating large dunes in the Chattian carbonate ramp of the Majella Mountains (Central Apennines, Italy). Sedimentary Geology 255-256, 29-41.

Carnevale, G., Landini, W., Sarti, G., 2006. Mare versus Lago-mare: marine fishes and the Mediterranean environment at the end of the Messinian Salinity Crisis. Journal of the Geological Society of London 163, 75–80.

Casero, P., 2004. Structural setting of petroleum exploration plays in Italy. In: Crescenti, U., d'Offizi, S., Merlino, S., Sacchi, L. (Eds.), Geology of Italy. Special Publication of the Italian Geological Society for the IGC 32nd. Florence, 2004, pp. 189-199.

Cornacchia, I., Andersson, P., Agostini, S., Brandano, M., Di Bella, L., 2017 Strontium stratigraphy of the upper Miocene Lithothamnion Limestone in the Majella Mountain, central Italy, and its palaeoenvironmental implications. Lethaia, 50, 561-575.

CIESM, 2008. TheMessinian salinity crisis from mega-deposits tomicrobiology. A consensus report. In: Briand, F., Monaco (Eds.), 33ème CIESM Workshop Monographs, 33, 91-96.

Cipollari, P., Cosentino, D., and Gliozzi, E., 1999. Extension- and compression-related basins in central Italy during the Messinian Lago-Mare event: Tectonophysics, 315, 163–185.

Cita, M.B., Corselli C., 1990. Messinian paleogeography and erosional surfaces in Italy: an overview. Palaeogeography, Palaeoclimatology, 77-1, 67-82.Clauzon, G., Suc, J.P., Gautier, F., Berger, A., Loutre, M.F., 1996. Alternate interpretation of the Messinian salinity crisis, controversy resolved? Geology, 24, 363–366.

Corcagnani, A., 2017. La Crisi di salinità del Messiniano nell'avampaese Adriatico: ricostruzione delle relazioni tra successioni onshore e offshore attraverso lo studio di log di pozzo e sismica industriale (Database ViDEPI).

Journal Pre-proof

Cosentino, D., Gliozzi, E., Pipponzi, G., 2007. The late Messinian Lago-Mare episode in the Mediterranean Basin: preliminary report on the occurrence of Paratethyan ostracod fauna from central Crete (Greece). Géobios, 40: 339-349.

Cosentino, D., Bertini, A., Cipollari, P., Florindo F., Gliozzi, E., Grossi, F., Lo Mastro, S., Sprovieri, M., 2012. Orbitally forced paleoenvironmental and paleoclimate changes in the late postevaporitic Messinian of the central Mediterranean Basin. GSA Bulletin, 124-3/4, 499–516.

Cosentino, D., Buchwaldt, R., Sampalmieri, G., Iadanza, A., Cipollari, P., Schildgen, T.F., Hinnov, L.A., Ramezani, J., Bowring, S.A., 2013. Refining the Mediterranean "Messinian gap" with high-precision U-Pb zircon geochronology, central and northern Italy. Geology, 41, 323-326.

Cosentino, D., Bracone, V., D'Amico, C., Cipollari, P., Esu, D., Faranda, C., Frezza, V., Gliozzi, E., Grossi, F., Guerrieri, P., Iadanza, A., Kotsakis, T., Soulié-Märsche, I., 2018. The record of the Messinian salinity crisis in mobile belts: Insights from the Molise allochthonous units (southern Apennines, Italy). Palaeogeography, Palaeoclimatology, Palaeoecology, 503, 112-130.

Cremonini, G., and Ricci Lucchi, F. ,1982. Guida alla geologia del margine appenninico padano. Guide Geologiche regionali della Società Geologica Italiana. Bologna.

Dela Pierre, F., Bernardi, E., Cavagna, S., Clari, P., Gennari, R., Irace, A., Lozar, F., Lugli, S., Manzi, V., Natalicchio, M., Roveri, M., Violanti, D., 2011. The record of the Messinian salinity crisis in the Tertiary Piedmont Basin (NW Italy): the Alba section revisited. Palaeogeography, Palaeoclimatology, Palaeoecology 310, 238–255.

Druckman, Y., Buchbinder, B., Martinotti, G.M., Tov, R.S., Aharon, P., 1995. The buried Afiq Canyon (eastern Mediterranean, Israel): a case study of a Tertiary submarine canyon exposed in Late Messinian times: Marine Geology, 123, 167-185.

Fantoni, R., Franciosi R., 2010. Tectono-sedimentary setting of the Po Plain and Adriatic Foreland. Rend. Fis. Acc. Lincei, 21/1, S197–S209

Fantoni, R., Decarlis A., Fantoni E., 2003. L'estensione mesozoica al margine occidentale delle Alpi Meridionali (Piemonte Settentrionale, Italia). Atti Ticinensi di Scienze della Terra, 44, 97–110.

Fauquette, S., Bertini, A., Manzi, V., Roveri, M., Argnani, A., Menichetti, E., 2015. Reconstruction of the Northern and Central Apennines (Italy) palaeoaltitudes during the late Neogene from pollen data. Review of Palaeobotany and Palynology, 218, 117-126.

Kastens, K., Mascle, J., et al., 1988. ODP Leg 107 in the Tyrrhenian sea: Insights into passive margin and back-arc basin evolution. Geological Society America Bulletin, 100, 1140-1156.

Journal Pre-proof

941 Krijgsman, W., Hilgen, F.J., Raffi, I., Sierro, F.J., Wilson, D.S., 1999. Chronology, causes
942 and progression of the Mediterranean salinity crisis. Nature 400, 652-655.

943 Hilgen, F.J., Kuiper, K., Krijgsman, W., Snel, E., van der Laan, E., 2007. Astronomical
944 tuning as the basis for high resolution chronostratigraphy: the intricate history of the
945 Messinian salinity crisis. Stratigraphy 4, 231-238.

946 Gennari, R., Manzi, V., Angeletti, L., Bertini, A., Biffi, U., Ceregato, A., Faranda, C.,
947 Gliozzi, E., Lugli, S., Menichetti, E., Rosso, A., Roveri, M., Taviani, M., 2013. A shallow
948 water record of the onset of the Messinian salinity crisis in the Adriatic foredeep
949 (Legnagnone section, Northern Apennines). Palaeogeography, Palaeoclimatology,
950 Palaeoecology, 386, 145–164.

951 Ghielmi, M., Minervini, M., Nini, C., Rogledi, S., Rossi, M., 2013. Late Miocene-Middle
952 Pleistocene sequences in the Po Plain-Northern Adriatic Sea (Italy): the stratigraphic
953 record of modification phases affecting a complex foreland basin. Marine Petroleum
954 Geology, 42, 50-81.

955 Gliozzi, E., Ceci, M.E., Grossi, F., Ligios, S., 2007. Paratethyan Ostracod immigrants in
956 Italy during the Late Miocene. Geobios, 40: 325–337.

957 Grossi, F., Cosentino, D., Gliozzi, E., 2008. Late Messinian Lago-Mare ostracods and
958 paleoenvironments of the central and eastern Mediterranean Basin. Boll. Soc. Paleont.
959 Ital. 47, 131–146.

960 Gvirtzman Z., Manzi V., Calvo R., Gavireli I., Gennari R., Lugli S., Reghizzi M., Roveri M.,
961 2017. Intra-Messinian truncation surface in the Levant Basin explained by subaqueous
962 dissolution. Geology, 45 (10), 915-918.

963 Gutscher, M.-A., Kopp, H., Krastel, S., Bohrmann, G., Garlan, T., Zaragosi, S., et al., 2017.
964 Active tectonics of the Calabrian subduction revealed by new multi-beam bathymetric
965 data and high-resolution seismic profiles in the Ionian Sea (Central Mediterranean).
966 Earth and Planetary Science Letters, 461, 61–72. https://doi.org/10.1016/j.
967 epsl.2016.12.020

968 Iaccarino, S.M., Bertini, A., Di Stefano, A., Ferraro, L., Gennari, R., Grossi, F., Lirer, F.,
969 Manzi, V., Menichetti, E., Ricci Lucchi, M., Taviani, M., Sturiale, G., Angeletti, L., 2008.
970 The Trave section (Monte dei Corvi, Ancona, Central Italy): an integrated
971 paleontological study of the Messinian deposits. Stratigraphy 5, 281–306.

972 Lofi, J., Gorini, C., Berné, S., Clauzon, G., Tadeu Dos Reis, A., Ryan,W.B.F., Steckler,M.,
973 2005. Erosional processes and paleo-environmental changes in the Western Gulf of
974 Lions (SW France) during the Messinian Salinity Crisis. Marine Geology 217, 1-30.

975 Lofi, J., 2018. Seismic Atlas of the Messinian salinity crisis markers in the Mediterranean
976 sea. Volume 2 - Memoires de la Societè Geologique de France, 181 doi: 10.10682/
977 2018MESSINV2

Journal Pre-proof

978 Lugli, S., Schreiber, B.C., Triberti, B., 1999. Giant polygons in the Realmontemine
979 (Agrigento, Sicily): evidence for the desiccation of a Messinian halite basin. Journal of
980 Sedimentary Research 69, 764-771.

981 Lugli, S., Bassetti, M.A., Manzi, V., Barbieri, M., Longinelli, A., Roveri, M., 2007. The
982 Messinian "Vena del Gesso" evaporites revisited: characterization of isotopic
983 composition and organic matter. Geological Society Special Publication 285, 179–190.

984 Lugli, S., Manzi, V., Roveri, M., Schreiber, B.C., 2010. The Primary Lower Gypsum in the
985 Mediterranean: a new facies interpretation for the first stage of the Messinian salinity
986 crisis. Palaeogeography, Palaeoclimatology, Palaeoecology, 297, 83–99.

987 Madof, A.S, Bertoni, C., Lofi, J., 2019. Discovery of vast fluvial deposits provides evidence
988 for drawdown during the late Miocene Messinian salinity crisis. Geology, 47 (2): 171-
989 174.

990 Manzi, V., 2001. Stratigrafia fisica, analisi sedimentologica microscopica e
991 caratterizzazione magnetostratigrafica dei depositi connessi all'evento evaporitico del
992 Messiniano (Formazione Gessoso-solfifera l.s.). PhD Thesis, University of Bologna

993 Manzi, V., Lugli, S., Ricci Lucchi, F., Roveri, M., 2005. Deep-water clastic evaporites
994 deposition in the Messinian Adriatic foredeep (northern Apennines, Italy): did the
995 Mediterranean ever dry out? Sedimentology, 52, 875-902.

996 Manzi, V., Roveri, M., Gennari, R., Bertini, A., Biffi, U., Giunta, S., Iaccarino, S.M., Lanci,
997 L., Lugli, S., Negri, A., Riva, A., Rossi, M.E., Taviani, M. (2007) The deep-water
998 counterpart of the Messinian Lower Evaporites in the Apennine foredeep: the
999 Fanantello section (Northern Apennines, Italy). Palaeogeography, Palaeoclimatology,
1000 Palaeoecology, 251, 470-499.

1001 Manzi, V., Lugli, S., Roveri, M., Schreiber, B.C., 2009. A new facies model for the Upper
1002 Gypsum (Sicily, Italy): chronological and palaeoenvironmental constraints for the
1003 Messinian salinity crisis in the Mediterranean. Sedimentology, 56, 1937–1960.

1004 Manzi, V., Lugli, S., Roveri, M., Schreiber, B.C., Gennari, R., 2011. The Messinian
1005 “Calcare di Base” (Sicily, Italy) revisited. Geological Society of America Bulletin 123,
1006 347–370.

1007 Manzi, V., Gennari, R., Lugli, S., Roveri, M., Scafetta, N., Schreiber, B.C., 2012. High-
1008 frequency cyclicity in the Mediterranean Messinian evaporites: evidence for solar-lunar
1009 climate forcing. Journal of Sedimentary Research 82, 991–1005.

1010 Manzi, V., Gennari, R., Hilgen, F., Krijgsman, W., Lugli, S., Roveri, M., Sierro, F.J., 2013.
1011 Age refinement of the Messinian salinity crisis onset in the Mediterranean. Terra Nova
1012 25, 315-322.

Journal Pre-proof

1013 Manzi, V., Gennari, R., Lugli, S., Persico, D., Reghizzi, M., Roveri, M., Schreiber, B.C.,
1014 Calvo, R., Gavrieli, I., Gvirtzman, Z., 2018. The onset of the Messinian salinity crisis in
1015 the deep Eastern Mediterranean basin. Terra Nov. 38, 42-49.

1016 Masetti, D., Fantoni, R., Romano, R., Sartorio, D., Trevisani, E., 2012.
1017 Tectonostratigraphic evolution of the Jurassic extensional basins of the eastern
1018 southern Alps and Adriatic foreland based on an integrated study of surface and
1019 subsurface data. AAPG Bulletin, 96/11, 2065–2089.

1020 Matano, F., Barbieri, M., Di Nocera, S., Torre, M., 2005. Stratigraphy and strontium
1021 geochemistry of Messinian evaporite-bearing successions of the southern Apennines
1022 foredeep, Italy: implications for the Mediterranean “salinity crisis” and regional
1023 palaeogeography. Palaeogeography, Palaeoclimatology, Palaeoecology, 217, 87-114.

1024 Matano, F., 2007. Evaporite deposits of the Messinian southern Apennines foreland basin
1025 (Irpinia-Daunia Mts., southern Italy). In: Schreiber, B.C., Lugli, S., Babel, M. (Eds.),
1026 Evaporites through Space and Time, Geological Society, London, Special Publications,
1027 285, 165-192.

1028 Meilijson, A., Steinberg, J., Hilgen, F., Bialik, O.M., Waldmann, N.D., Makovsky, Y., 2018.
1029 Deep-basin evidence resolves a 50-year-old debate and demonstrates synchronous
1030 onset of Messinian evaporite deposition in a non-desiccated Mediterranean. Geology
1031 46, 4–7.

1032 Meilijson, A., Hilgen, F., Sepulveda, J., Steinberg, J., Fairbank, V., Flecker, R., Waldmann,
1033 N.D., Spaulding, S.A., Bialik, O.M, Boudinot, F.G., Illner, P., Makovsly, Y., 2019.
1034 Chronology with a pinch of salt: Integrated stratigraphy of Messinian evaporites in the
1035 deep Eastern Mediterranean reveals long-lasting halite deposition during Atlantic
1036 connectivity. Earth-Science Reviews, 194, 374-398.

1037 Milli, S., Moscatelli M., Stanzione, O., Falcini F., 2007. Sedimentology and physical
1038 stratigraphy of the Messinian turbidite deposits of the Laga Basin (central Apennines,
1039 Italy). Boll.Soc.Geol.It. (Ital.J.Geosci.), 126, 255-281.

1040 Ochoa, D., Sierro, F.J., Lofi, J., Maillard, A., Flores, J.A., Suarez, M., 2015. Synchronous
1041 onset of the Messinian evaporite precipitation: First Mediterranean offshore evidence.
1042 Earth Planetary Science Letters, 427, 112-124.

1043 Ori, G.G., Roveri, M., Vannoni, F., 1986, Plio-Pleistocene sedimentaton in the Apenninic-
1044 Adriatic foredeep (central Adriatic Sea, Italy). In: Foreland Basin (Ed. By P.A., Allen& P.
1045 Homewood), Spec. Pub. Int. Ass. Sed., 8, 183-198.

1046 Orszag-Sperber, F., 2006. Changing perspectives in the concept of “Lago-Mare” in
1047 Mediterranean Late Miocene evolution. Sedimentary Geology, 188-189: 259-277.

1048 Patacca, E., Scandone, P., 2007. Geology of the Southern Apennines. In: Mazzotti A.,
1049 Patacca E., Scandone P. (Eds.), Results of the CROP Project, Sub-project CROP-04
1050 Southern Apennines (Italy), 75–119. Spec. Issue 7, Boll. Soc. Geol .It. (Ital.J.Geosci.).

Journal Pre-proof

Journal Pre-proof

Patacca, E., Scandone, P., 2011. Calabria and Peloritani: Where did they stay before the Corsica-Sardinia rotation? Boundary conditions, internal geological constraints and first-order open problems. Rendiconti online Soc. Geol. It., 15, 97-101.

Pellen, R., Popescu, S.M., Suc, J.P., Melinte-Dobrinescu M.C., Rubino J.L., Rabineau, M., Marabini S., Loget, N., Casero, P., Cavazza, W., Head, M..J., Aslanian, D., 2017. The Apennine foredeep (Italy) during the latest Messinian: Lago Mare reflects competing brackish and marine conditions based on calcareous nannofossils and dinoflagellate cyst. Geobios. 50, 237-257.

Popescu, S.-M., Melinte-Dobrinescu,M.C., Dalesme, F., Süto-Szentai, M., Jouannic, G., Bakrac, K., Escarguel, G., Clauzon, G., Head, M.J., Suc, J.-P., 2009. Galeacysta Etrusca complex: dinoflagellate cyst marker of paratethyan influxes to the Mediterranean Sea before and after the Peak of the Messinian Salinity Crisis. Palinology 33, 105–134.

Ricci Lucchi, F., 1975. Miocene palaeogeography and basin analysis in the Periadriatic Apennines. In: Geology of Italy (Ed. by C. Squyres), 2, 129-236. PESL, Castelfranco-Tripoli.

Ricci Lucchi, F., 1986, The Oligocene to Holocene foreland basins of the northern Apennines. In Allen, P.A., and Homewood, P. (Eds.) Foreland basins: International Association of Sedimentologists Special Publication 8, 105-139.

Ricci Lucchi, F., Bassetti, M.A., Manzi, V., Roveri, M. (2002) Il Messiniano trent'anni dopo: eventi connessi alla crisi di salinità nell'avanfossa appenninica. Studi Geologici Camerti, 1, 127-142.

Rizzini, F., 2005. Il sistema d'avanfossa dell'Appennino settentrionale durante la crisi di salinità del Messiniano: vincoli tettonostraigrafici per una ricostruzione paleogeografica. PhD Thesis, University of Parma.

Roda, C., 1964. Distribuzione e facies dei sediment neogenici nel Bacino Crotonese. Geologica Romana, 3, 319-366.

Rossi, M., Rogledi, S., Barbacini, G., Casadei, D., Iaccarino, S., Papani, G., 2002. Tectono-stratigraphic architecture of Messinian piggyback basins of northern Apennines: the Emilia folds in the Reggio-Modena area and comparison with the Lombardia and Romagna sectors. Boll. Soc. Geol. It. 1, 437-447.

Rossi M., Minervini M., Ghielmi M., Rogledi S., 2015. Messinian and Pliocene erosional surfaces in the Po Plain-Adriatic Basin: Insights from allostratigraphy and sequence stratigraphy in assessing play concepts related to accommodation and gateway turnarounds in tectonically active margins.

Rouchy, J.M., Orszag-Sperber, F., Blanc-Valleron, M.-M., Pierre, C., Rivière, M., Combourieu-Nebout, N., Panayides, I., 2001. Paleoenvironmental changes at the

Journal Pre-proof

Messinian–Pliocene boundary in the eastern Mediterranean (southern Cyprus basins): significance of the Messinian Lago-Mare. Sedimentary Geology, 145: 93-117.

Roveri M., Ori G.G., Zitellini N., 1986, Sedimentazione Plio-Quaternaria nell'Adriatico centrale. In: Atti Riunione Gruppo Sedimentologia, CNR, Ancona, 5-7 giugno 1986, 141-146.

Roveri M., Bernasconi A., Rossi M.E., Visentin C., 1992, Sedimentary evolution of the Luna Field area, Calabria, southern Italy. AGIP SpA-PETER, 20097, S. Donato Milanese, Milano, Italy.

Roveri, M., Manzi, V., Bassetti, M.A., Merini, M., Ricci Lucchi, F., 1998. Stratigraphy of the Messinian post-evaporitic stage in eastern Romagna (northern Apennines, Italy). Giornale di Geologia, 60, 119-142.

Roveri M., Argnani A., Lucente C. C., Manzi V., Ricci Lucchi F. 1999. Guida all'escursione nelle valli del Marecchia e del Savio. 6 ottobre 1999 Riunione autunnale del Gruppo Informale di Sedimentologia, Rimini, 3-6 Ottobre 1999.

Roveri, M., Bassetti, M.A., Ricci Lucchi, F., 2001. The Mediterranean Messinian salinity crisis: an Apennine foredeep perspective. Sediment. Geol. 140, 201–214.

Roveri, M., Manzi, V., Ricci Lucchi, F., & Rogledi, S. (2003). Sedimentary and tectonic evolution of the Vena del Gesso basin (Northern Apennines, Italy): Implications for the onset of the Messinian salinity crisis. Geological Society of America Bulletin, 115, 387–405.

Roveri M., Boscolo Gallo A. Rossi M.E., Gennari R., Iaccarino S.M., Lugli S., Manzi V., Negri A., Rizzini F., Taviani M. (2005) The Adriatic foreland record of Messinian events (central Adriatic Sea, Italy). Geoacta, 4, 139-158.

Roveri M., Landuzzi A., Bassetti M.A. Lugli S., Manzi V., Ricci Lucchi F., Vai G.B., 2004. The record of Messinian events in the northern Apennines foredeep basins. B19 Field trip guidebook. 32nd International Geological Congress, Firenze, 20-28Agosto 2004.

Roveri, M., Manzi, V., 2006. The Messinian salinity crisis: Looking for a new paradigm? Palaeogeography, Palaeoclimatology, Palaeoecology 238, 386-398.

Roveri M., Gennari R., Grossi F., Lugli S., Manzi V., Iaccarino S.M., Taviani M., 2006., The record of Messinian events in the Northern Apennines foredeep basins. Acta Naturalia de l'Ateneo Parmense, 42/3, 47-123.

Roveri, M., Lugli, S., Manzi, M., Schreiber, B.C., 2008a. The Messinian Sicilian stratigraphy revisited: new insights for the Messinian salinity crisis. Terra Nova 20, 483–488.

Roveri, M., Lugli, S., Manzi, V., Schreiber, B.C., 2008b. The Messinian salinity crisis: a sequence-stratigraphic approach. Geoacta Special Publication 1, 117–138.

Journal Pre-proof

Roveri,M., Bertini, A., Cosentino,D.,Di Stefano, A.,Gennari, R.,Gliozzi, E.,Grossi, F., Iaccarino, S.M., Lugli, S., Manzi, V., Taviani,M., 2008c. A high-resolution stratigraphic framework for the latest Messinian events in the Mediterranean area. Stratigraphy 5, 323–342.

Roveri M., Lugli S., Manzi V., Schreiber B.C., 2008d. The shallow- to deep-water record of the Messinian salinity crisis: New insights from Sicily, Calabria, and Apennine basins, in Briand, F., The Messinian Salinity Crisis Mega-Deposits to Microbiology—A Consensus Report: Commission Internationale pour l'Exploration Scientifique de la mer Méditerranée (CIESM) Workshop Monographs, 33, 73–82.

Roveri, M., Lugli, S., Manzi, V., Gennari, R. & Schreiber, B.C. 2014a. High-resolution strontium isotope stratigraphy of the Messinian deep Mediterranean basins: implications for marginal to central basins correlation. Marine Geology, 349, 113-125.

Roveri M., Flecker R., Krijgsman W., Lofi J., Lugli S., Manzi V., Sierro F.J., Bertini A., Camerlenghi A., De Lange G., Govers R., Hilgen F.J., Hübscher C., Meijer P.Th., Stoica M., 2014b. The Messinian Salinity Crisis: past and future of a great challenge for marine sciences. Marine Geology, 352, 25-28.

Roveri, M., Manzi, V., Bergamasco, A., Falcieri, F., Gennari, R., Lugli, S. 2014c. Dense shelf water cascading and Messinian canyons: a new scenario for the Mediterranean salinity crisis. American Journal of Science, 314, 751-784.

Roveri M., Gennari. R, Lugli S., Manzi V., Minelli N., Reghizzi M., Riva A., Rossi M.E., Schreiber B.C., 2016. The Messinian salinity crisis: open problems and possible implications for Mediterranean petroleum systems. Petroleum Geoscience, 22, 283-290.

Roveri M, Gennari R., Ligi M., Lugli S., Manzi V., Reghizzi M., 2019. The synthetic seismic expression of the Messinian salinity crisis from onshore records: implications for shallow- to deep-water correlations. Basin Research, 31, 1121-1152.

Ruggieri, G., 1967. The Miocene and later evolution of the Mediterranean Sea. In: Adams, C.G., Ager, D.V. (Eds.), Aspects of Tethyan Biogeography, vol. 7. Systematics Association Publication, London, U.K., pp. 283–290.Ryan,W.B.F., Cita,M.B., 1978. The nature and distribution of Messinian erosion surfaces, indicators of a several-kilometer-deepMediterranean in the Miocene. Marine Geology, 27/3-4,193-230.

Ruggieri G. 1970 Note Illustrative della Carta Geologica d'Italia alla Scala 1:100.000, Foglio 108, Mercato Saraceno. Servizio Geologico d'Italia 1-56.

Ruggieri G., Torre G., 1984. Il Miocene Superiore di Cozzo Terravecchia, Sicilia Centrale. Giornale di Geologia, 46, 33-43.

Sampalmieri, G., Cipollari P., Cosentino, D., Iadanza, A., Lugli, S., Soligo, M., 2008: Le facies evaporitiche della crisi di salinità messiniana: Radioattività naturale della Formazione Gessoso-Solfifera della Maiella (Abruzzo, Italia centrale). Boll. Soc. Geol. Ital., 127, 25-36.

Journal Pre-proof

Sampalmieri, G., Iadanza, A., Cipollari, P., Cosentino D., Lo Mastro, S., 2010. Paleoenvironments of the Mediterranean Basin at the Messinian hypersaline/hyposaline transition: Evidence from natural radio activity and micro facies of post-evaporitic successions of the Adriatic sub-basin. Terra Nova, 22, 239-250

Santantonio, M., Scrocca, D., Lipparini, L., 2013. The Ombrina-Rospo Plateau (Apulian Platform): Evolution of a Carbonate Platform and its Margins during the Jurassic and Cretaceous. Marine and Petroleum Geology, 42, 4-29.

Sierro, F.J., Flores, J.A., Zamarreño, I., Vazquez, A., Utrilla, R., Frances, G., Hilgen, F.J., Krijgsman, W., 1999. Messinian pre-evaporite sapropels and precession-induced oscillations in western Mediterranean climate. Marine Geology 153, 137-146.

Trincardi, F., and Argnani, A., 2001. Carta Geologica dei Mari Italiani alla scala 1:250000: Foglio JOG NL33-10 “Ravenna”, ISPRA – Servizio Geologico d’Italia., Selca, Firenze.

Trincardi, F., Argnani, A., Coreggiari, A., 2011a. Carta Geologica dei Mari Italiani alla scala 1:250:000. Foglio NL33-7 Venezia, ISPRA - Servizio Geologico d’Italia, Selca, Firenze.

Trincardi, F., Argnani, A., Coreggiari, A., 2011b. Carta Geologica dei Mari Italiani alla scala 1:250:000. Foglio NK33-1/2 Ancona, ISPRA - Servizio Geologico d’Italia, Selca, Firenze.

Trincardi, F., Argnani, A., Coreggiari, A., 2011c. Carta Geologica dei Mari Italiani alla scala 1:250:000. Foglio NK33-5 Pescara, , ISPRA - Servizio Geologico d’Italia, Selca, Firenze.

Trincardi, F., Argnani, A., Coreggiari, A., 2011d. Carta Geologica dei Mari Italiani alla scala 1:250:000. Foglio NK33-6 Vieste, ISPRA - Servizio Geologico d’Italia, Selca, Firenze.

Trincardi, F., Argnani, A., Coreggiari, A., 2011e. Carta Geologica dei Mari Italiani alla scala 1:250:000. Foglio NK33-8/9 Bari, ISPRA - Servizio Geologico d’Italia, Selca, Firenze.

Trua, T., Manzi, V., Roveri, M., Artoni, A., 2010. The Messinian volcaniclastic layers of the Northern Apennines: evidence for the initial phases of the Southern Tyrrhenian spreading? Ital.J.Geosci., 129-2, 269-279,

Vai, G.B., 1988. A field trip guide to the Romagna Apennine geology: the Lamone valley. In: De Giuli, C., Vai, G.B. (Eds.), Fossil Vertebrates in the Lamone Valley, Romagna Apennines, Int. Work. Continental Faunas at the Miocene/Pliocene Boundary, pp. 7–37.

Vai, G.B., 1997. Cyclostratigraphic estimate of the Messinian Stage duration. In: Montanari, A., Odin, G.S., Coccioni, R. (Eds.), Miocene Stratigraphy: An Integrated Approach. Developments in Paleontology and Stratigraphy, 15, pp. 463–476.

Vai, G.B., 2016. Over half a century of Messinian salinity crisis. Boletín Geológico y Minero, 127 (2/3), 615-632.

Van Couvering, J.A., Castradori, D., Cita, M.B., Hilgen, F.J. and Rio, D., 2000. The base of the Zanclean Stage and of the Pliocene Series. Episodes, 23–3, 179–187.

Journal Pre-proof

Van Dijk, J.P., Bello M., Brancaleoni G.P., Cantarella G., Costa V., Frixa A., Golfetto F., Merlini S., Riva M., Torricelli S., Toscano C., Zerilli A., 2000. A regional structural model for the northern sector of the Calabrian Arc (southern Italy). Tectonophysics, 324, 267-320.

Vasiliev, I., Lugli, S., Reichart, G.J., Manzi V., Roveri, M., 2017. How dry was the Mediterranean during the Messinian salinity crisis? Palaeogeography, Palaeoclimatology, Palaeoecology, 471, 120–133.

Vitale, S., Ciarcia, S., 2013: Tectono-stratigraphic and kinematic evolution of the southern Apennines/Calabria-Peloritani Terrane system (Italy). Tectonophysics, 538, 164-182.

Wrigley R., Hodgson N., Esestime P., 2015. Petroleum geology and hydrocarbon potential of the Adriatic basin, offshore Croatia. Journal of Petroleum Geology, 38/3, 301-316.

Zecchin M., Massari F., Mellere G., Prosser G., 2003. Architectural styles of prograding wedges in a tectonically active setting, Crotone Basin, Southern Italy. J. Geol. Soc. Lond., 160, 863-880.

Figure captions

Fig.1. A) Geological map of the Central and Southern Apennines and, in the inset (B), a schematic structural map of Italy. The map includes: i) the location of the boreholes used for this study; ii) **the main MSC basins**, both outcropping (after Manzi, 2001; Roveri et al., 2003; Manzi et al., 2005; Roveri et al., 2006) and buried under the Po plain (after Manzi, 2001; Roveri et al., 2003; Rizzini, 2005; Ghielmi et al., 2013; Rossi et al., 2015); iii) the extension in the Adriatic offshore of the MSC deposits (modified from CNR map) below the Pliocene units; iv) the main tectonic structures (modified from CNR map); v) the main diapirs of Triassic evaporites and the distribution of the Dalmatian Mesozoic Platform deposit (modified after Wrigley et al., 2015); vi) the extension in the Adriatic offshore of the MSC deposits (modified from CNR map) below the Pliocene units; vii) the location of the boreholes used for this study.
The main **MSC basins**, both outcropping (after Manzi, 2001; Roveri et al., 2003; Manzi et al., 2005; Roveri et al., 2006) and buried under the Po plain (after Manzi, 2001; Roveri et al., 2003; Rizzini, 2005; Ghielmi et al., 2013; Rossi et al., 2015). Two types can be distinguished. **PLG basins** - basins that hosted the deposition of shallow water primary evaporites (PLG unit) during stage 1: Epiligurian (E), Emilia-Veneto (EV), Vena del Gesso (VdG), Val Marecchia (VM), Molise (M), Maiella (MA), Irpinia (I), Adriatic (A). **RLG basins** - those where only clastic evaporites (RLG unit) were deposited during stage 2: Messinian

Journal Pre-proof

main foredeep (MF), Eastern Romagna (ER), Northern Marche (NM), Laga (L), Bradanic Trough (B), Sibari-Rossano (S), Crotone basins (K), South Adriatic Basin (SAB).
The main **tectonic features** are: Apennines buried thrust front (ABTF), Livorno Sillaro line (LS), Forlì Line (FL), Val Marecchia line (VM), Sibillini Mountains thrust line (SM), Olevano-Antrodoco line (OA), Chienti Line (C), Gran Sasso thrust front (GS), Maiella Rocca Monfina line (MRM), Gargano high (G), Murge high (M), Sangineto line (SG).
The main **tectonic units/domains**: Ligurian units (L), Tuscan unit (T), Macigno-Cervarola unit (MC), Inner Umbro-Marchean units (IUM), Outer Umbro-Marchean units (OUM), Lazio-Abruzzi platforms (LAP), Molise-Lagonegro nappes (MLN), Bradanic Trough (BT), Calabrian Arc (CA), Apulian Mesozoic platform (AP), Dalmatian Mesozoic Platform (DP), Dinaric units (DU).

Fig. 2. Outcrop examples of the MSC evaporites. A) the PLG unit forms an up 200 m-thick tabular body with strong lateral persistence. (Vena del Gesso, between the Sgarba stream and the Senio river). The location of the Monte Tondo quarry and Spes quarry sections, where the reference PLG sections have been measured by Lugli et al. (2010), are reported. Photo, courtesy of Piero Lucci; B) closer view of the Monte del Casino area shown in A, notice the thickest beds of the lower PLG cycles (PLG3 partially covered by the vegetation, PLG4, PLG5, PLG6). Photo, courtesy of P. Lucci; C) example of the RLG unit (left side of the Lese river valley, Crotone basin) consisting of alternation of hybrid carbonate-gypsum clastic turbidites and shale resting on top of the Ponda Fm (badlands). B and C are reported at the same scale to allow the immediate comparison between the PLG showing thicker beds separated by very thin shale beds (B) and the RLG where thinner beds are intercalated by shale intervals of similar thickness (C).

Fig. 3. Outcrop examples of the MSC evaporites. A) a normal fault in the PLG unit close to the Spes quarry (fig. 2) allow a direct comparison between the lower and the upper PLG gypsum beds. Notice the homogeneous aspect of the cycles PLG3-5 made up by the massive and banded selenite facies only. B) Closer view of cycle PLG8 and PLG9 (base; Monte Tondo quarry). Notice that the lower part of the bed consisting of massive selenite is more resistant to the weathering of the upper part of the cycle consisting of branching selenite. C) turbiditic gypsarenite beds (ga) alternated to dark organic-rich shale (s). B and C are reported at the same scale to allow the immediate comparison between the PLG

Journal Pre-proof

showing thicker beds separated by very thin shale beds (B) and the RLG where thinner beds are intercalated by shale intervals (C).

Fig. 4. A) Location of the ViDEPI boreholes in the study area; in black the available boreholes; in yellow those that cross the MSC deposits resting above the Autochthonous domain; in red the boreholes that are were drilled above the Translated Allochthonous Domain (see the trace of the front of the allochthonous). B) distribution of the different facies deposited during the Tortonian-Messinian interval, preceding the salinity crisis onset. The siliciclastic deposition is limited to two area, one in the northern Apennines foredeep and one above the Calabrian Arc. Elsewhere the hemipelagic deposition is prevalent, Notice the presence of shallow water carbonate in a small area between the Gargano and the Gran Sasso. C) distribution of the different facies deposited during stage 1. The PLG deposition occurred mainly in the foreland area in the Adriatic offshore. Minor basins were located in the inner foredeep (VdG, Vena del Gesso basin), and in the foreland (now buried below the Po plain). D) distribution of the different facies deposited during the post-evaporitic interval (stage 2 and 3). Notice that the halite was deposited only above the allochthonous units of the Calabrian Arc.

Fig. 5. Cross section of the PLG unit in the Adriatic offshore. The separation line between the different cycles (PLG1-2, PLG3-5 and PLG6-16) has been used for correlation.

Fig. 6. Isopach maps of the PLG unit showing the general distribution in the study area (A) and the detail in the Adriatic offshore focusing on the thickness of the PLG1+2 (B), PLG3 (C) and PLG4 (D) cycles. Notice as the thickness of the single beds increase in the eastern (close to the Adriatic midline) and in the south-western (close to the Molise and Gargano coastline) part of the basin. Modified after Corcagnani, 2017.

Fig. 7. Regional scale cross sections showing the distribution of the MSC deposits in the Adriatic Foredeep and in above the Allochthonous. A) N-S oriented section showing that the areas were PLG (to the north) and RLG (to the south) evaporites were deposited is separated by an area with pre-MSC carbonate deposits. Other PLG deposits are found above at the front of the Allochthonous nappe. B) W-E section showing the RLG unit found

Journal Pre-proof

below the Allochthonous; its distribution is limited to the east by a tectonic slope affecting the Apula Mesozoic units. These onlap can be better observed in the seismic (C)

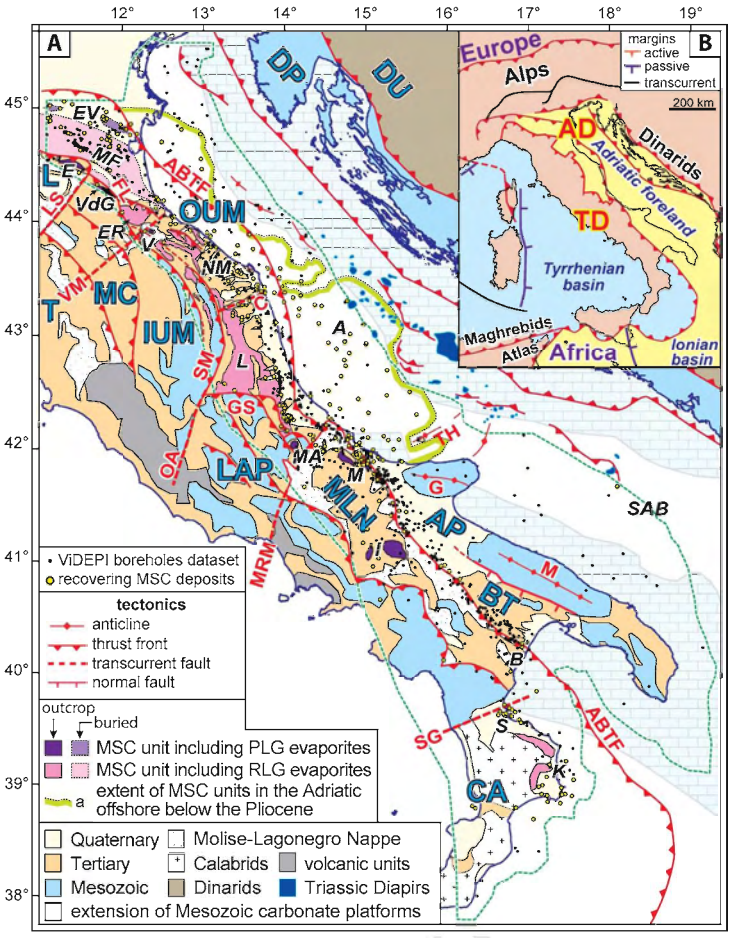
Fig. 8. Distribution of the Messinian evaporites in the Basilicata area representing the northernmost extension of the salt deposits. The RLG units including also gypsum is found at the front of the Allochthonous unit only whereas no MSC deposits are found above Apula. All the seismic lines cited in the figure and the logs of the boreholes are available from http://www.videpi.com/videpi/videpi.asp.

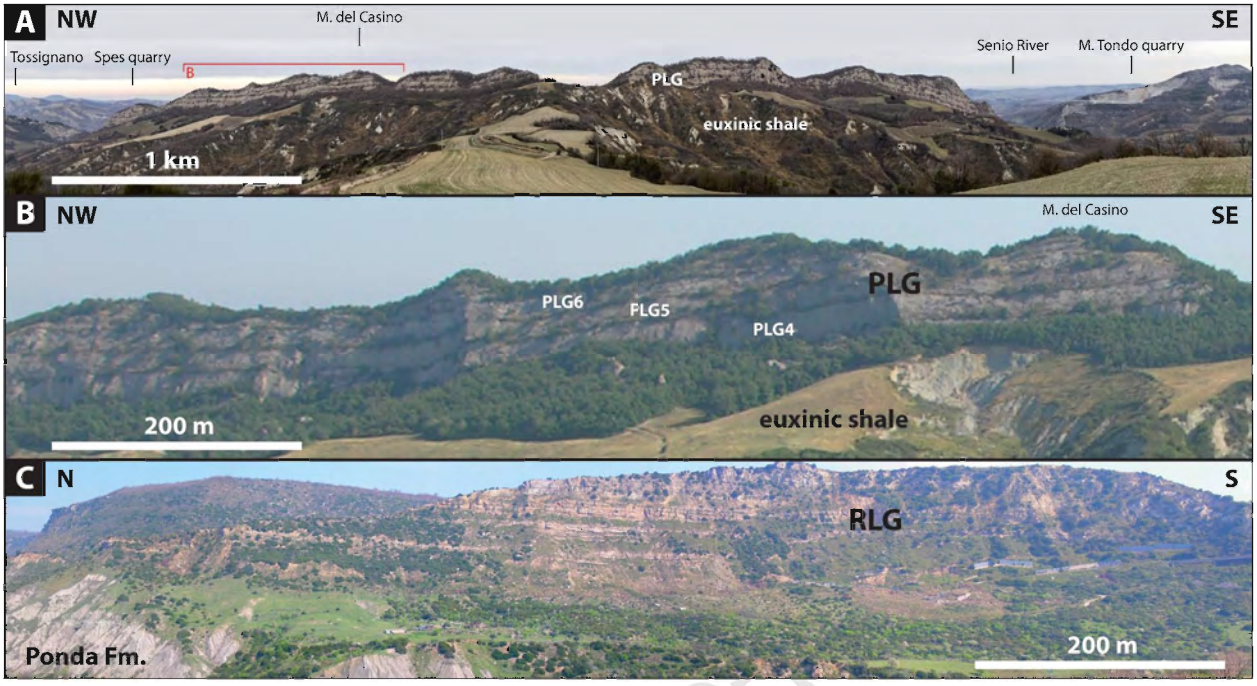
Fig. 9. A) Map of the distribution of the Messinian evaporite facies with location of the regional seismic sections (B and C) across the Apennines foredeep. Section B is traced in the Northern Apennines from the Vena del Gesso basin (VdG) to the Veneto foreland (modified after Roveri et al., 2003 and Fantoni et al., 2010; Masetti et al., 2012). Section C is traced in the central Apennines from the Laga basin to the Adriatic offshore (Modified from Bigi et al., 2009 and Wrigley et al., 2015). The seismic profiles cited in blue are and the logs of the boreholes are available from http://www.videpi.com/videpi/videpi.asp. Notice that: i) the distribution of the PLG evaporites during stage 1 limited to the more elevated structural basins in the Apenninc chain and in the foreland (in section B), whereas in the foredeep the stage 1 of the crisis is recorded by organic-rich shales (Manzi et al., 2007); ii) the hiatus associated with the MES (section C) progressively reduces moving westward into the Laga depocenter and a possible MES-cc can be envisaged below the gypsarenits belonging to the Evaporitic Member of the Laga Formation (Manzi et al., 2005; Milli et al., 2007). RA, Riolo Anticline; BST, Budrio-Selva Thrust; TT, Tresigallo Thrust; FT, Ferrara Thrust; AA, Acquasanta Anticline; MTF, Montagna dei Fiori Thrust; BT, Bellante Thrust; CS, Costal Structure. The stage 2 + 3 interval crossed by boreholes may be recorded exclusively by siliciclastic (s) deposits or may include also resedimented gypsum deposits (g), commonly found at the base.

Fig. 10. Paleogeographic map of the Central Mediterranean during the stage 2 of the Messinian salinity crisis showing the distribution of the paleogeographic domains and the main sedimentary facies. The distribution of the PLG (stage 1) in the foreland region is also indicated. The dark gray patter in the Adriatic represents a sill separating the southern and central-northern basin. The front of the Apennine accretionary wedge is marked in red (line with triangles), whereas the Apennine front is in black. The tentative route of clastic

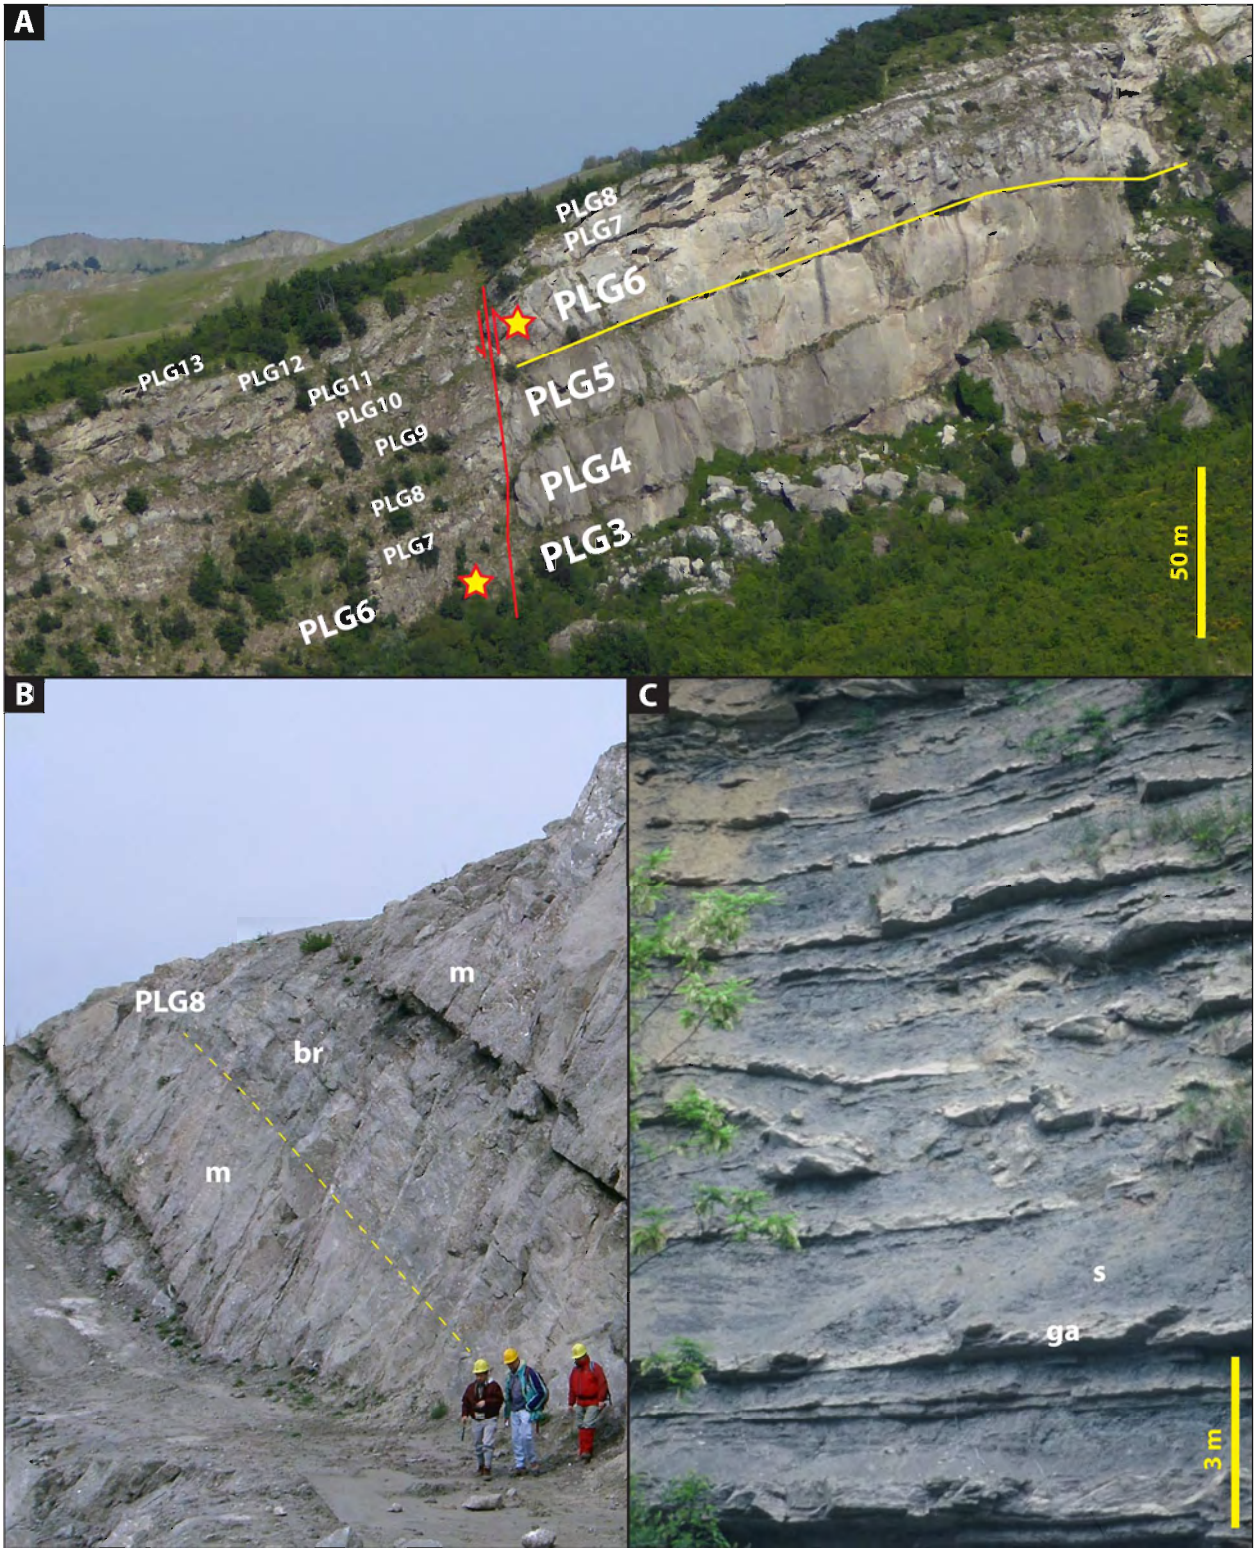
gypsum transport (black arrows) and the flow of brines (red arrows) are also indicated. Main basins: VdG, Vena del Gesso; A, Adriatic; K, Crotone; T, Tyrrhenian; AP, Algero-Provencal; C, Caltanissetta; H, Hyblean; I, Irpinian; B, Basilicata Ionian. Modified from Argnani 2000; 2005; Manzi et al., 2005; Fauquette et al., 2015.

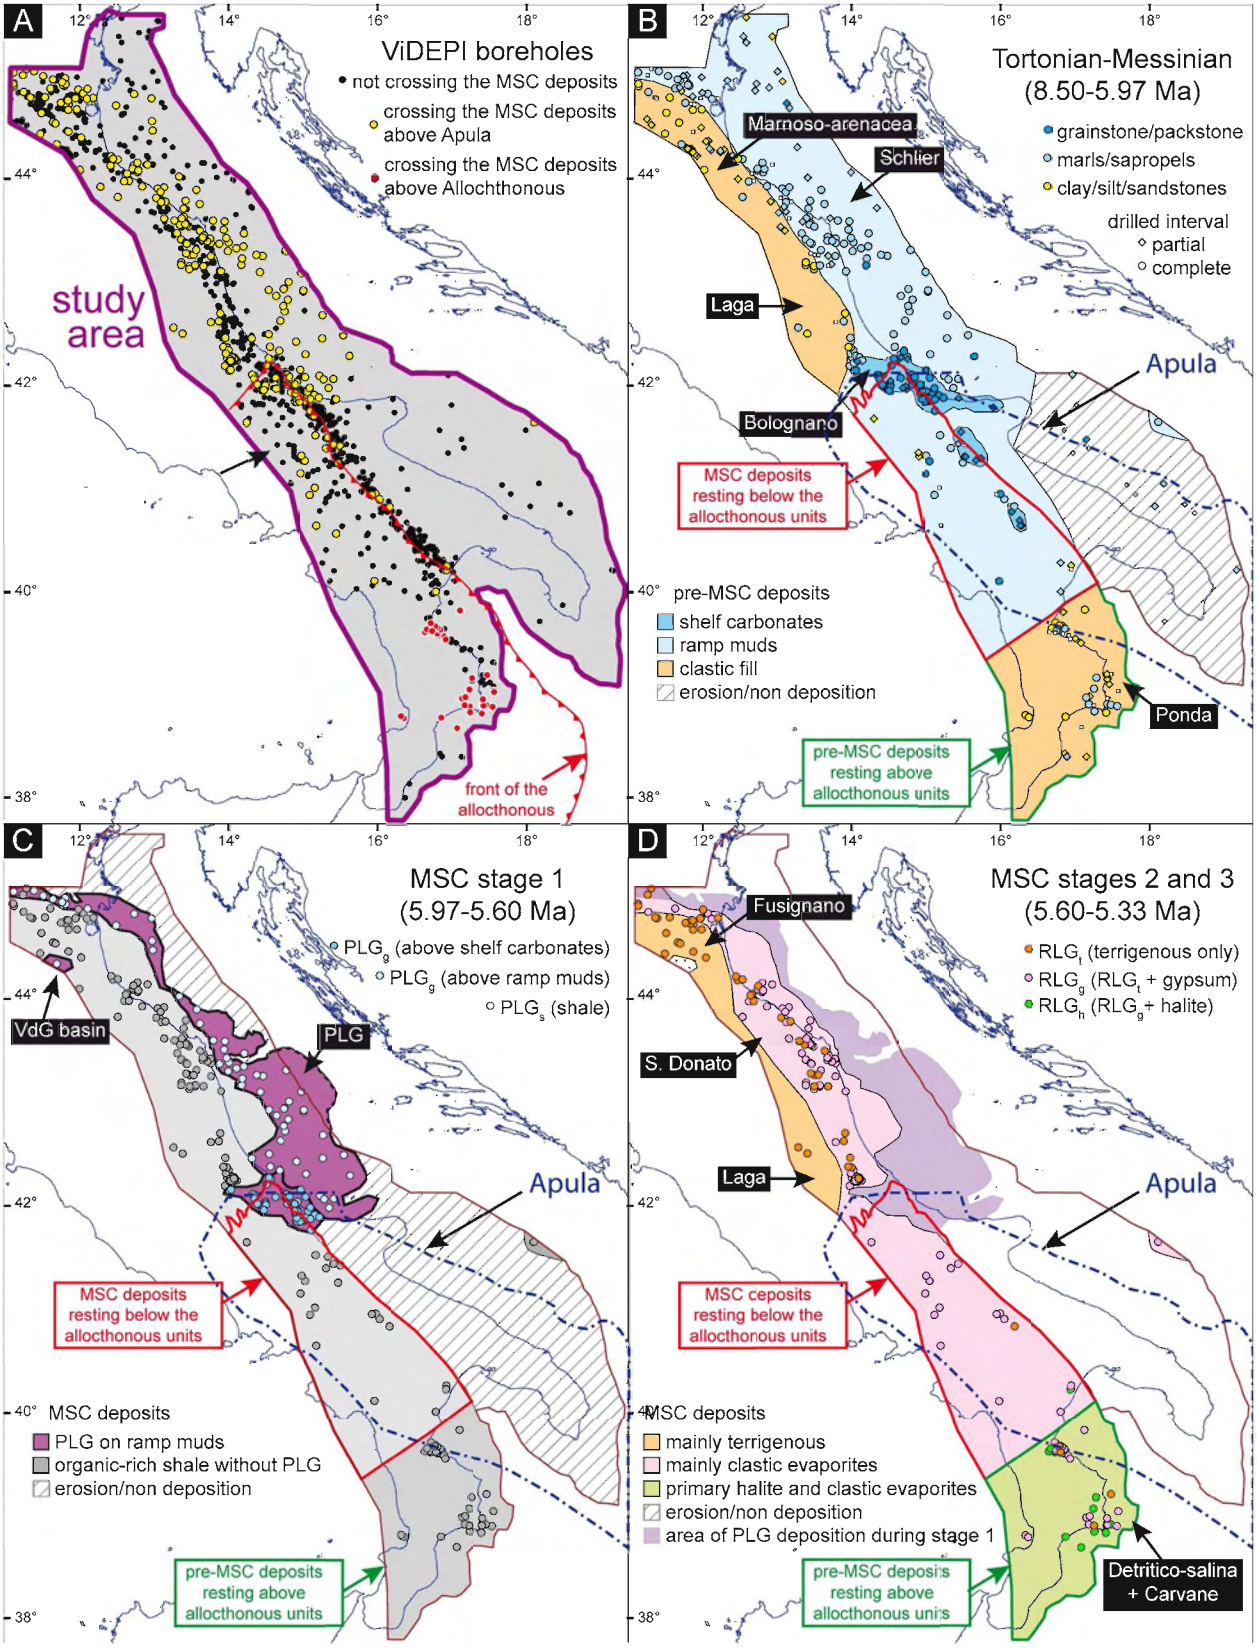
Journal Pre-proof

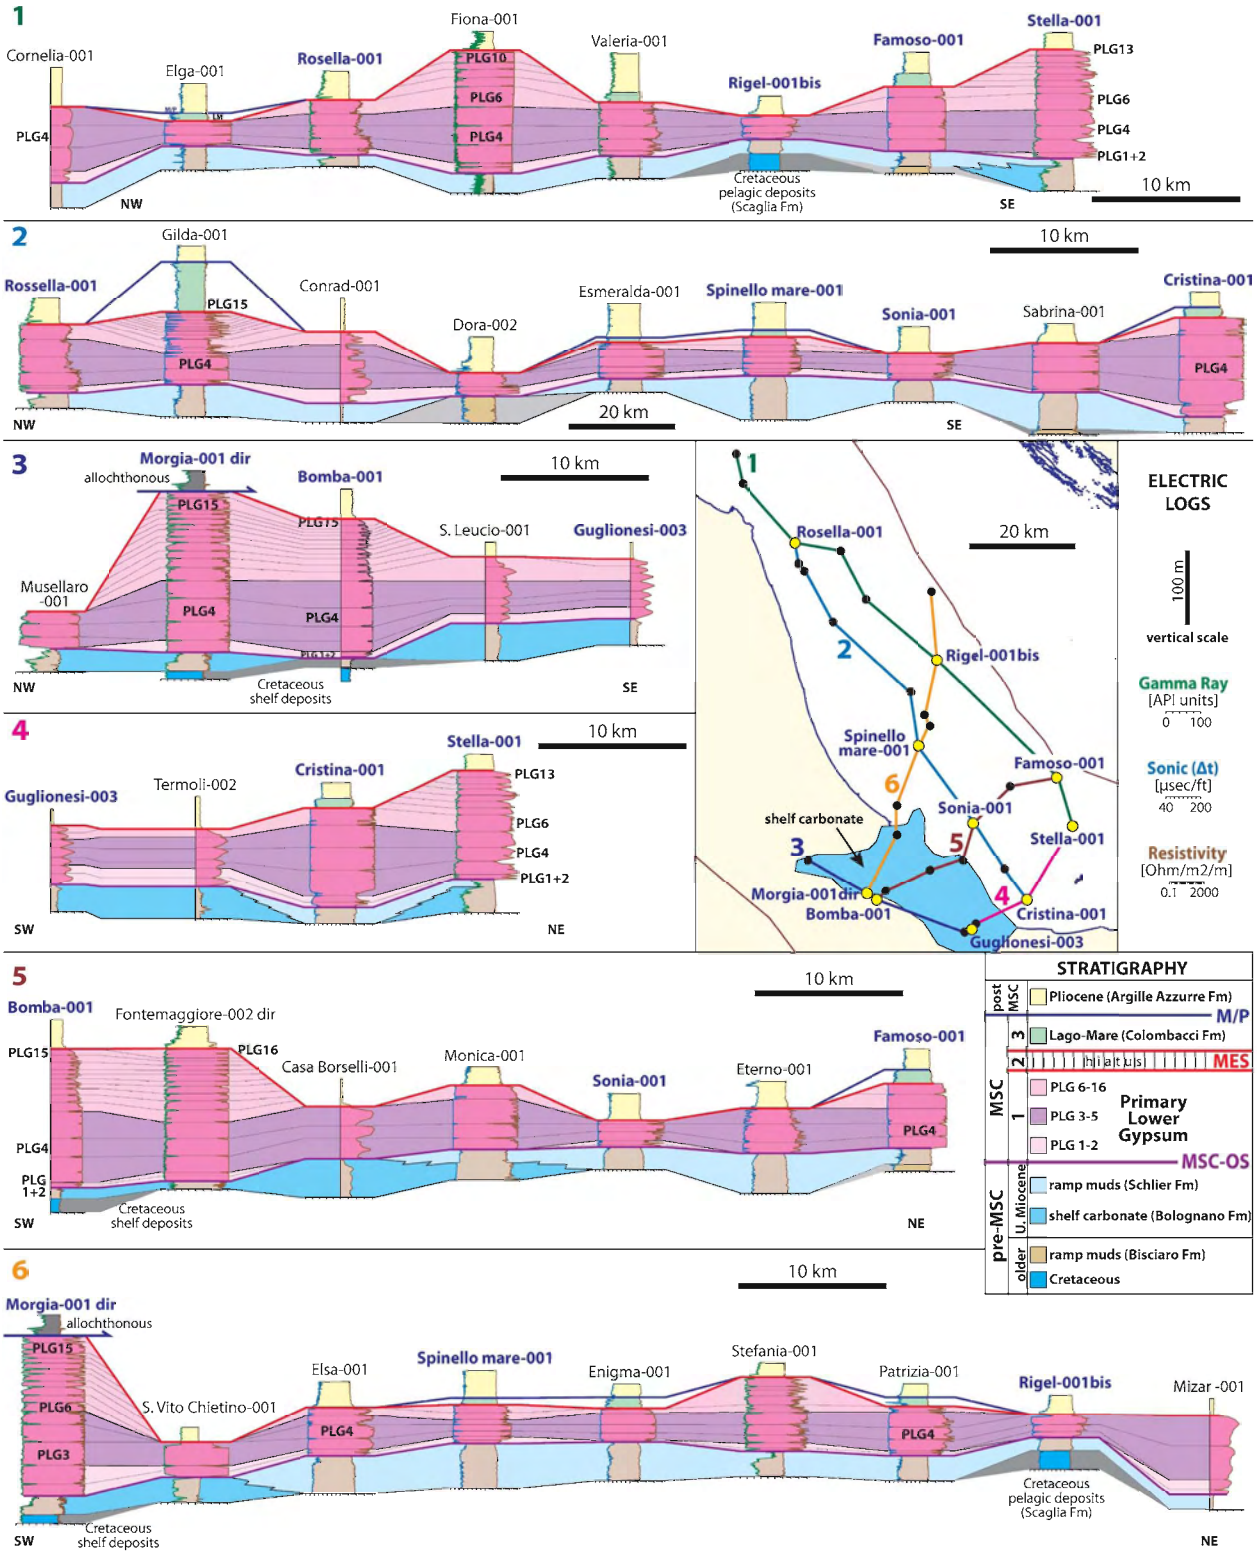

A
B
12°
13°
14°
15°
16°
17°
18°
19°
45°
44°
43°
42°
41°
40°
39°
38°
DP
DU
EV
MF
ABTF
VdG
ER
OUM
NM
VM
MC
IUM
SM
GS
OA
LAP
MA
MLN
AP
SAB
TH
G
M
BT
SG
CA
MRM
Europe
Alps
AD
Dinarids
Adriatic foreland
T.D
Tyrrhenian basin
Maghrebids
Atlas
Africa
Ionian basin
margins
active
passive
transcurrent
200 km
ViDEPI boreholes dataset
recovering MSC deposits
tectonics
anticline
thrust front
transcurrent fault
normal fault
outcrop
buried
MSC unit including PLG evaporites
MSC unit including RLG evaporites
extent of MSC units in the Adriatic offshore below the Pliocene
Quaternary
Tertiary
Mesozoic
Molise-Lagonegro Nappe
Calabrids
Dinarids
volcanic units
Triassic Diapirs
extension of Mesozoic carbonate platforms

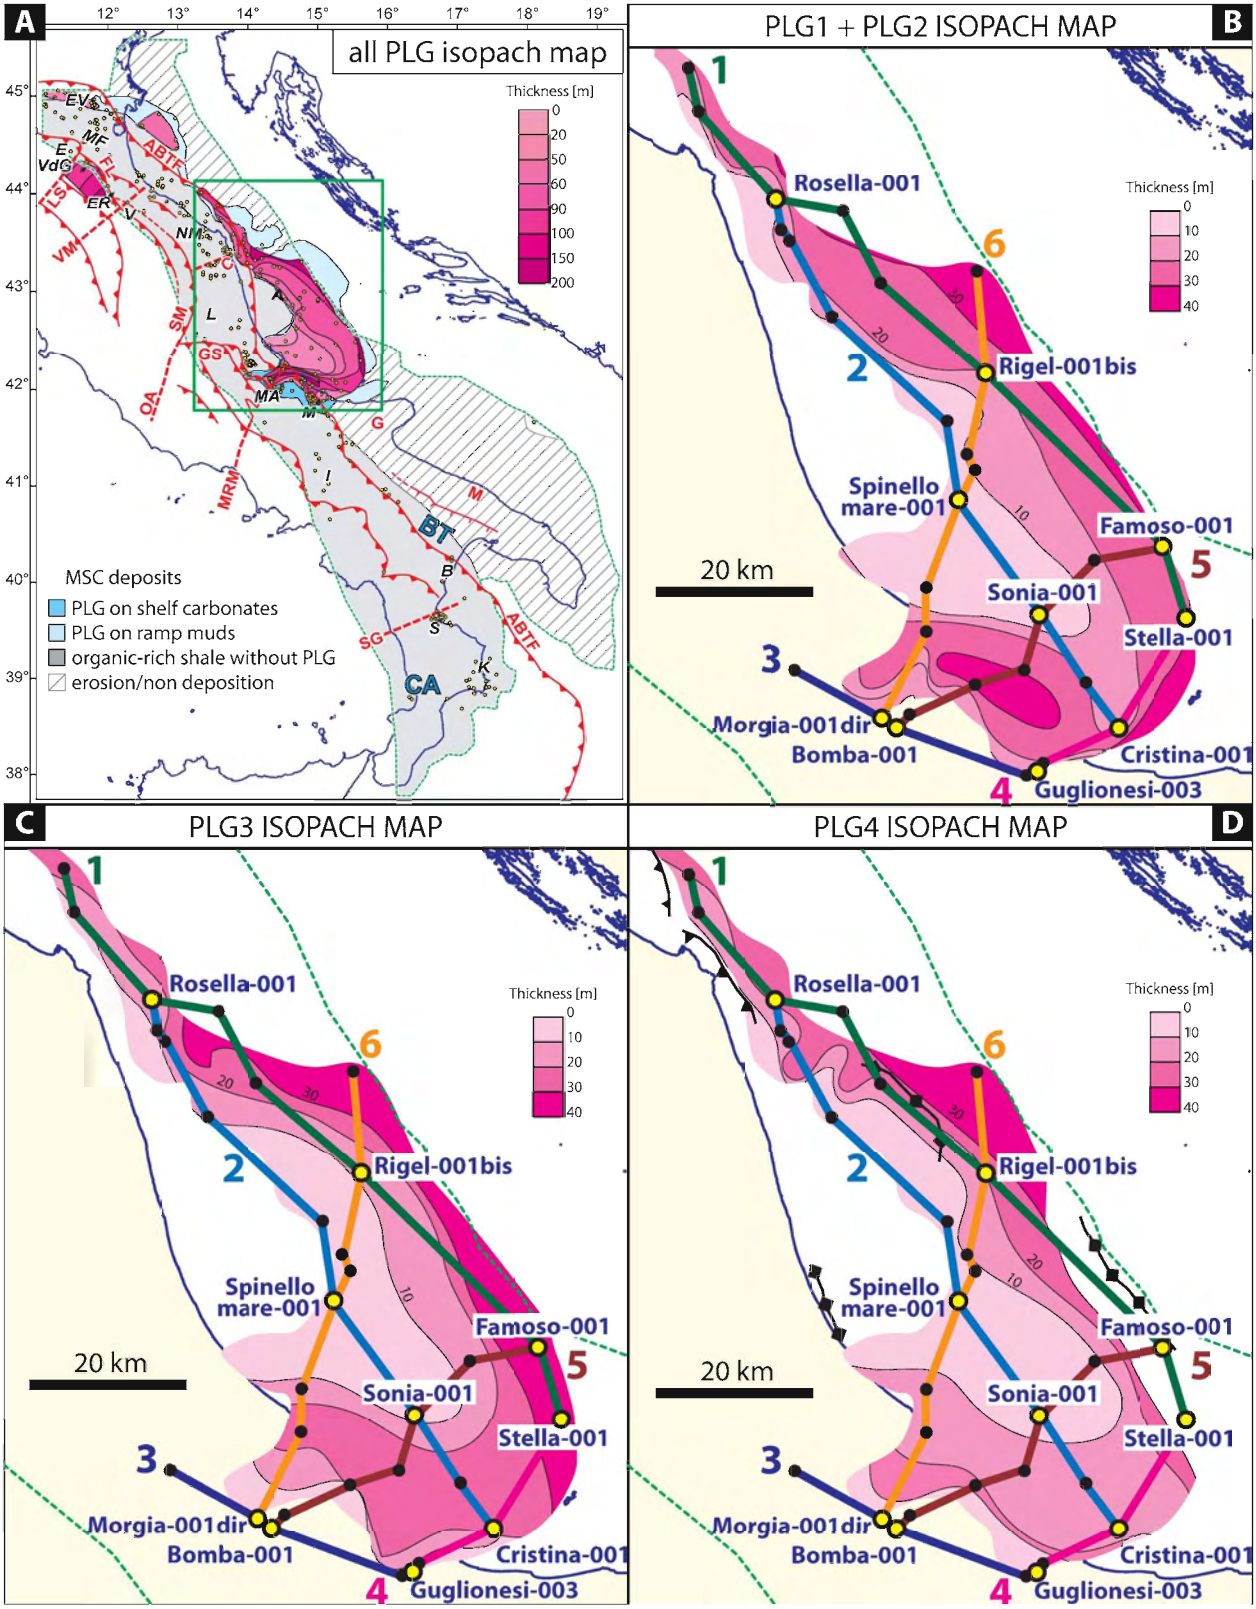


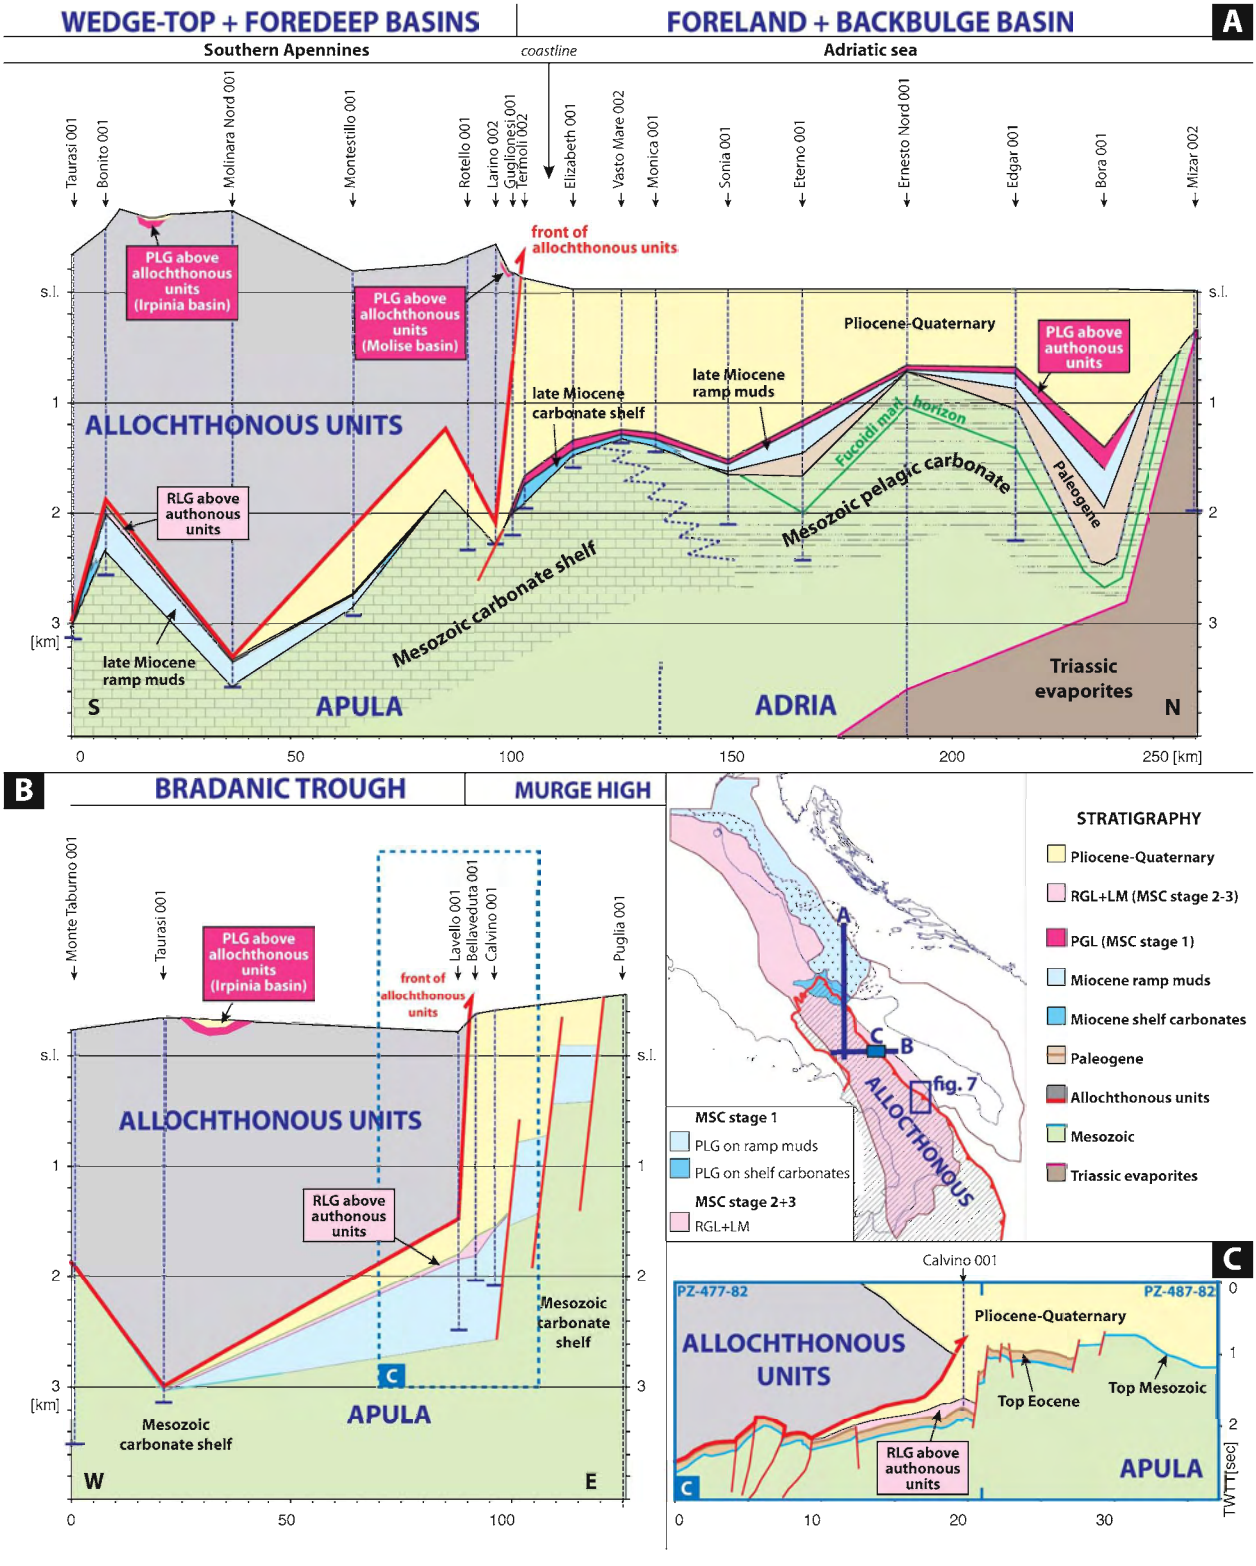
Journal Pre-proof

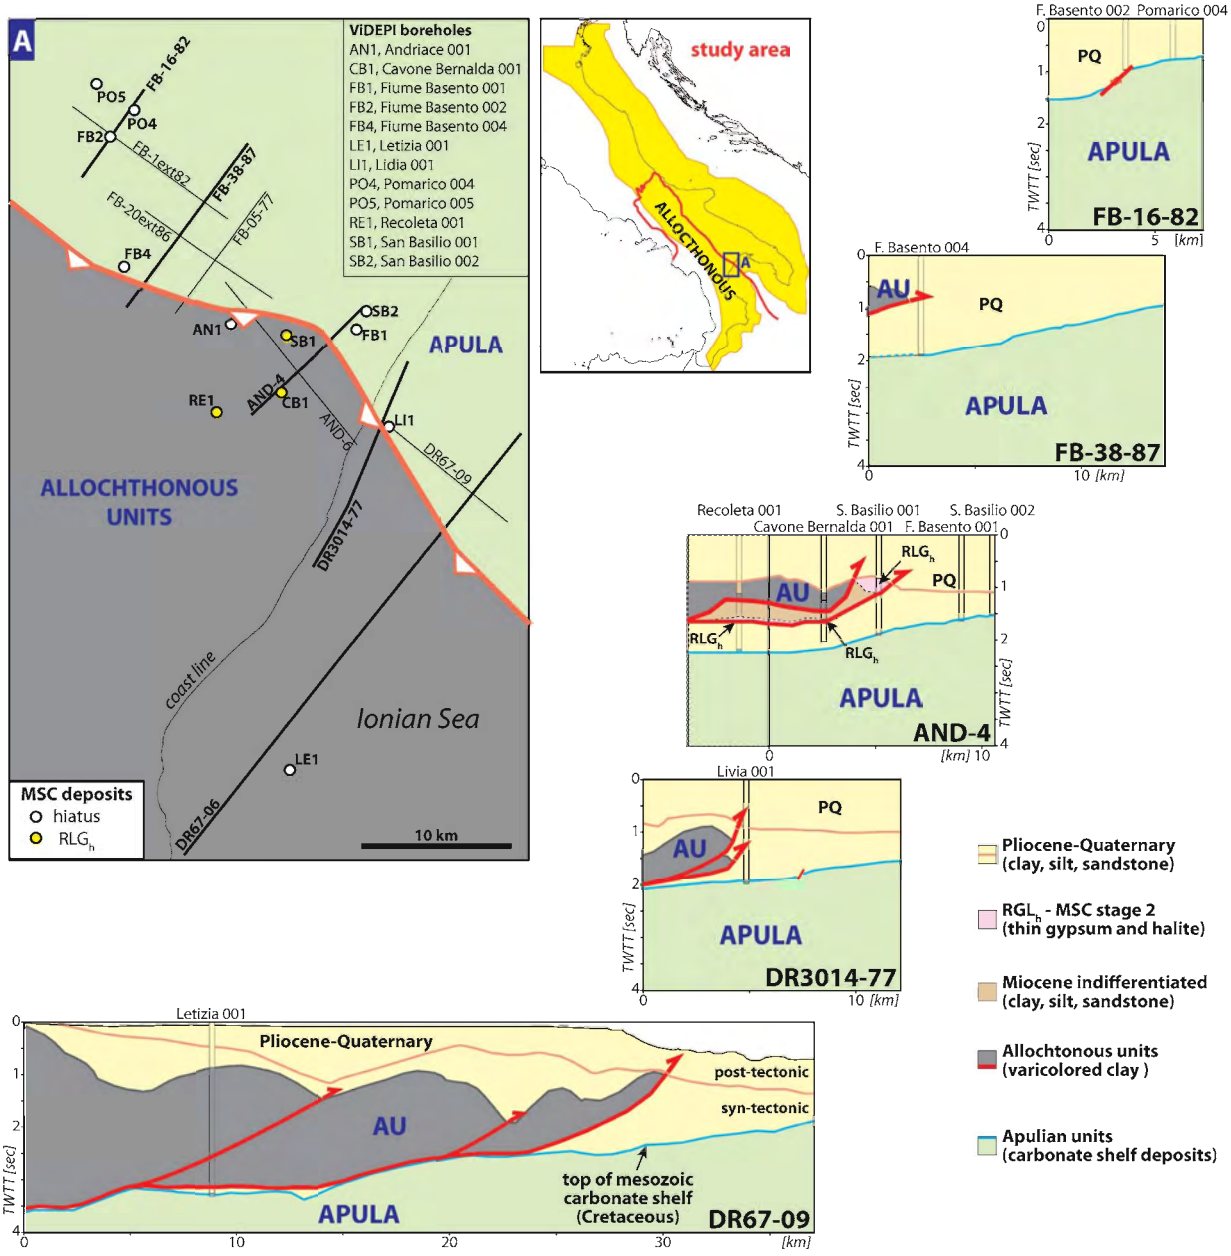

A
PLG8
PLG7
PLG6
PLG5
PLG4
PLG3
PLG13
PLG12
PLG11
PLG10
PLG9
PLG8
PLG7
PLG6
50 m
B
PLG8
br
m
m
C
s
ga
3 m


A
ViDEPI boreholes
not crossing the MSC deposits
crossing the MSC deposits above Apula
crossing the MSC deposits above Allochthonous
study area
front of the allocthonous
B
Tortonian-Messinian (8.50-5.97 Ma)
Marnoso-arenacea
Schlier
grainstone/packstone
marls/sapropels
clay/silt/sandstones
drilled interval
partial
complete
Laga
Apula
Bolognano
MSC deposits resting below the allocthonous units
pre-MSC deposits
shelf carbonates
ramp muds
clastic fill
erosion/non deposition
Ponda
pre-MSC deposits resting above allocthonous units
C
MSC stage 1 (5.97-5.60 Ma)
PLG$_g$ (above shelf carbonates)
PLG$_g$ (above ramp muds)
PLG$_s$ (shale)
VdG basin
PLG
Apula
MSC deposits resting below the allocthonous units
MSC deposits
PLG on ramp muds
organic-rich shale without PLG
erosion/non deposition
pre-MSC deposits resting above allocthonous units
D
MSC stages 2 and 3 (5.60-5.33 Ma)
Fusignano
RLG$_t$ (terrigenous only)
RLG$_g$ (RLG$_t$ + gypsum)
RLG$_h$ (RLG$_g$ + halite)
S. Donato
Laga
Apula
MSC ceposits resting below the allocthonous units
MSC deposits
mainly terrigenous
mainly clastic evaporites
primary halite and clastic evaporites
erosion/non deposition
area of PLG deposition during stage 1
pre-MSC deposits resting above allocthonous units
Detritico-salina + Carvane

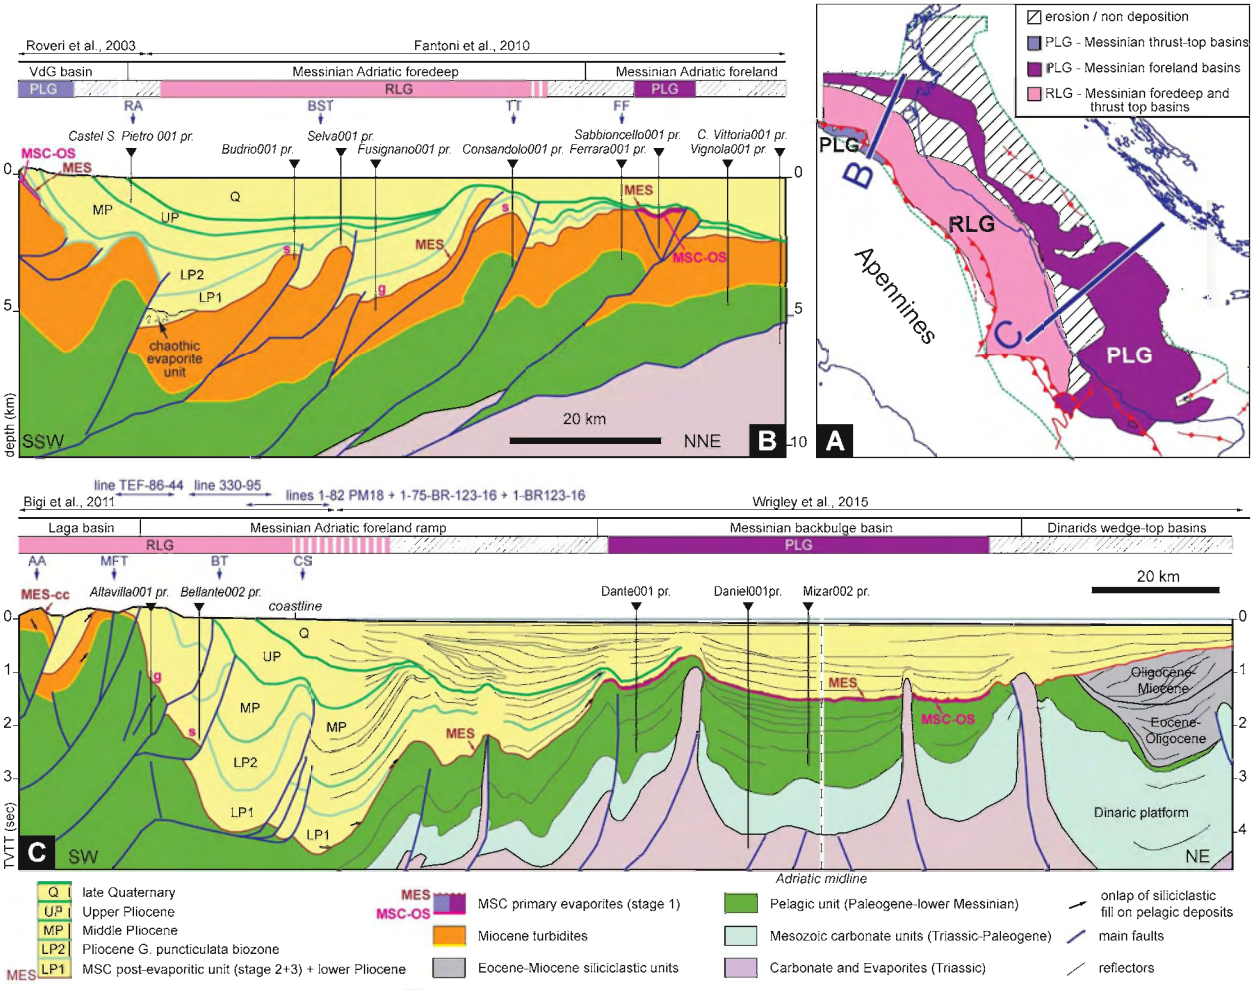

1
Cornelia-001
Elga-001
Rosella-001
Fiona-001
Valeria-001
Rigel-001bis
Famoso-001
Stella-001
PLG13
PLG10
PLG6
PLG4
PLG1+2
Cretaceous pelagic deposits (Scaglia Fm)
NW
SE
10 km
2
Gilda-001
Rossella-001
Conrad-001
Dora-002
Esmeralda-001
Spinello mare-001
Sonia-001
Sabrina-001
Cristina-001
PLG15
20 km
3
Morgia-001 dir
allochthonous
Bomba-001
S. Leucio-001
Guglionesi-003
Musellaro -001
Cretaceous shelf deposits
4
Stella-001
Cristina-001
Termoli-002
Guglionesi-003
SW
NE
5
Bomba-001
Fontemaggiore-002 dir
Casa Borselli-001
Monica-001
Sonia-001
Eterno-001
Famoso-001
PLG16
PLG15
PLG 1+2
6
Morgia-001 dir
S. Vito Chietino-001
Elsa-001
Spinello mare-001
Enigma-001
Stefania-001
Patrizia-001
Rigel-001bis
Mizar -001
PLG3
Cretaceous shelf deposits
Cretaceous pelagic deposits (Scaglia Fm)
shelf carbonate
ELECTRIC LOGS
100 m
vertical scale
Gamma Ray
[API units]
0 100
Sonic (Δt)
[μsec/ft]
40 200
Resistivity
[Ohm/m2/m]
0.1 2000
STRATIGRAPHY
post MSC
Pliocene (Argille Azzurre Fm)
M/P
MSC
Lago-Mare (Colombacci Fm)
MES
PLG 6-16
PLG 3-5
PLG 1-2
Primary Lower Gypsum
MSC-OS
pre-MSC
U. Miocene
ramp muds (Schlier Fm)
shelf carbonate (Bolognano Fm)
older
ramp muds (Bisciaro Fm)
Cretaceous

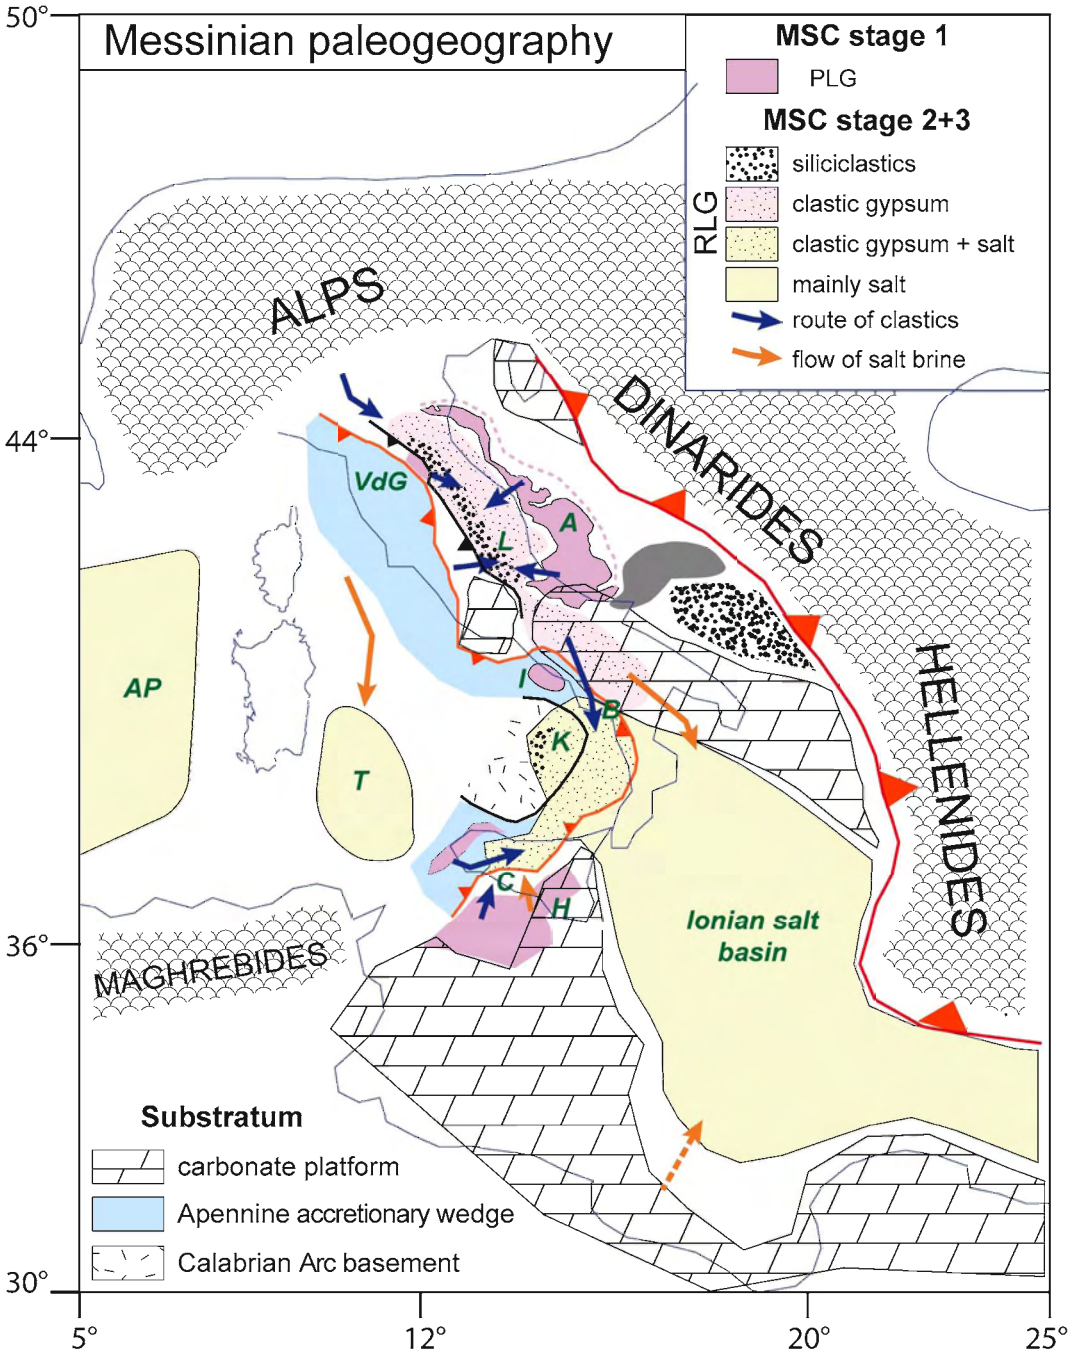

A
all PLG isopach map
Thickness [m]
0
20
50
60
90
100
150
200
MSC deposits
PLG on shelf carbonates
PLG on ramp muds
organic-rich shale without PLG
erosion/non deposition
EVS
MF
E
VdG
FL
LST
ER
V
VM
ABTF
NM
C
A
L
SM
CS
QA
MA
M
G
I
MRM
BT
B
S
SG
CA
K
12°
13°
14°
15°
16°
17°
18°
19°
45°
44°
43°
42°
41°
40°
39°
38°
B
PLG1 + PLG2 ISOPACH MAP
Thickness [m]
0
10
20
30
40
Rosella-001
Rigel-001bis
Spinello mare-001
Famoso-001
Sonia-001
Stella-001
Morgia-001dir
Bomba-001
Cristina-001
Guglionesi-003
20 km
C
PLG3 ISOPACH MAP
D
PLG4 ISOPACH MAP


A
WEDGE-TOP + FOREDEEP BASINS
FORELAND + BACKBULGE BASIN
Southern Apennines
coastline
Adriatic sea
Taurasi 001
Bonito 001
Molinara Nord 001
Montestillo 001
Rotello 001
Larino 002
Guglionesi 001
Termoli 002
Elizabeth 001
Vasto Mare 002
Monica 001
Sonia 001
Eterno 001
Ernesto Nord 001
Edgar 001
Bora 001
Mizar 002
front of allochthonous units
PLG above allochthonous units (Irpinia basin)
PLG above allochthonous units (Molise basin)
Pliocene-Quaternary
PLG above authonous units
late Miocene carbonate shelf
late Miocene ramp muds
ALLOCHTHONOUS UNITS
Fucoidi marl horizon
Mesozoic pelagic carbonate
Paleogene
RLG above authonous units
Mesozoic carbonate shelf
late Miocene ramp muds
Triassic evaporites
S
APULA
ADRIA
N
s.l.
[km]
0
50
100
150
200
250 [km]
B
BRADANIC TROUGH
MURGE HIGH
Monte Taburno 001
Taurasi 001
PLG above allochthonous units (Irpinia basin)
front of allochthonous units
Lavello 001
Bellaveduta 001
Calvino 001
Puglia 001
ALLOCHTHONOUS UNITS
RLG above authonous units
Mesozoic carbonate shelf
APULA
C
W
E
STRATIGRAPHY
Pliocene-Quaternary
RGL+LM (MSC stage 2-3)
PGL (MSC stage 1)
Miocene ramp muds
Miocene shelf carbonates
Paleogene
Allochthonous units
Mesozoic
Triassic evaporites
A
B
C
fig. 7
ALLOCHTHONOUS
MSC stage 1
PLG on ramp muds
PLG on shelf carbonates
MSC stage 2+3
RGL+LM
C
Calvino 001
PZ-477-82
PZ-487-82
Pliocene-Quaternary
ALLOCHTHONOUS UNITS
Top Eocene
Top Mesozoic
RLG above authonous units
APULA
TWTT [sec]
0
10
20
30


A
ViDEPI boreholes
AN1, Andriace 001
CB1, Cavone Bernalda 001
FB1, Fiume Basento 001
FB2, Fiume Basento 002
FB4, Fiume Basento 004
LE1, Letizia 001
LI1, Lidia 001
PO4, Pomarico 004
PO5, Pomarico 005
RE1, Recoleta 001
SB1, San Basilio 001
SB2, San Basilio 002
PO5
FB-16-82
PO4
FB2
FB-1ext82
FB-38-87
FB-20ext86
FB-05-77
FB4
AN1
SB1
SB2
FB1
APULA
RE1
AND-4
CB1
AND-6
LI1
DR67-09
ALLOCHTHONOUS UNITS
DR3014-77
coast line
Ionian Sea
LE1
DR67-06
10 km
MSC deposits
hiatus
RLG$_h$
study area
ALLOCHTHONOUS
A
F. Basento 002 Pomarico 004
PQ
APULA
FB-16-82
TWTT [sec]
0 5 [km]
F. Basento 004
AU
PQ
APULA
FB-38-87
10 [km]
Recoleta 001
S. Basilio 001
S. Basilio 002
Cavone Bernalda 001
F. Basento 001
RLG$_h$
AU
PQ
RLG$_h$
RLG$_h$
APULA
AND-4
[km] 10
Livia 001
PQ
AU
APULA
DR3014-77
10 [km]
Letizia 001
Pliocene-Quaternary
post-tectonic
syn-tectonic
AU
top of mesozoic carbonate shelf (Cretaceous)
APULA
DR67-09
0 10 20 30 [km]
Pliocene-Quaternary (clay, silt, sandstone)
RGL$_h$ - MSC stage 2 (thin gypsum and halite)
Miocene indifferentiated (clay, silt, sandstone)
Allochtonous units (varicolored clay)
Apulian units (carbonate shelf deposits)

Journal Pre-proof




Messinian paleogeography
MSC stage 1
PLG
MSC stage 2+3
siliciclastics
clastic gypsum
clastic gypsum + salt
mainly salt
route of clastics
flow of salt brine
RLG
ALPS
DINARIDES
HELLENIDES
MAGHREBIDES
VdG
A
L
I
B
K
C
H
AP
T
Ionian salt basin
Substratum
carbonate platform
Apennine accretionary wedge
Calabrian Arc basement
50°
44°
36°
30°
5°
12°
20°
25°

- integration of outcrop and subsurface data led to depict the Messinian salinity crisis in the Adriatic foreland basin;
- the largest evaporitic basin ever described in the Mediterranean was located in the Adriatic foreland
- the distribution of evaporitic facies is a key to reconstruct the evolution of the Apennines

Journal Pre-proof

Journal Pre-proof

Declaration of interests

☒ The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

The Authors

Vinicio Manzi, Andrea Argnani, Alessandro Corcagnani, Stefano Lugli, Marco Roveri

Journal Pre-proof